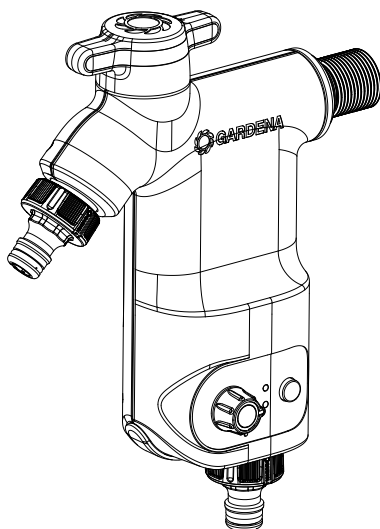


**Art. No. 16510**

DuoTap Automatic

en **Operator's manual**
Irrigation computer

GARDENA DUOTAP IRRIGATION COMPUTER

1. SAFETY INSTRUCTIONS	5
1.1 General safety instructions	5
1.2 Additional safety instructions	5
1.2.1 Intended use	5
1.2.2 Safety instructions for batteries	5
1.2.3 Additional electrical safety instructions	6
1.2.4 Additional personal safety instructions	6
2. PRODUCT DESCRIPTION	7
2.1 Batteries	7
2.1.1  LED display for the batteries	8
2.2 DuoTap on rain water tank	9
2.3 Soil moisture sensor	10
2.3.1  LED display for the soil moisture sensor	10
2.4 Operation	11
2.4.1 Automatic irrigation	11
2.4.2 Changing the start time	12
2.4.3 Child lock	12
2.4.4 Irrigation recommendations	12
3. ASSEMBLY	13
3.1 Inserting the batteries	13
3.2 Installing DuoTap on a rain water tank	14
3.3 Connecting the soil moisture sensor	15

4. OPERATION	16
4.1 Automatic irrigation	16
4.1.1 Changing the start time	16
4.1.2 Resetting the start time	16
4.2 Manual irrigation	17
4.3 Activating/deactivating the childproof lock	18
4.3.1 Activating the childproof lock	18
4.3.2 Deactivating the childproof lock	18
5. STORAGE	19
6. MAINTENANCE	20
6.1 Cleaning the dirt filter	20
6.2 Cleaning the DuoTap	20
7. TROUBLESHOOTING	21
8. TECHNICAL DATA	22
9. ACCESSORIES / SPARE PARTS	23
10. SERVICE / WARRANTY	24
10.1 Service	24
10.2 Warranty	24
11. DISPOSAL	25
11.1 To dispose of the product	25
11.2 To dispose of the batteries	25

Translation of the original instructions



For safety reasons, children and young people under 16 as well as anyone who is not familiar with this operator's manual should not use the product. Persons with reduced physical or mental abilities may use the product only if they are supervised or instructed by a responsible person. Children must be supervised to ensure that they do not play with the product.

→ Do not use the product if you are tired, ill or under the influence of alcohol, drugs or medication.

1. SAFETY INSTRUCTIONS

1.1 General safety instructions

Important!

- Read the operator's manual carefully before use and keep for future reference

1.2 Additional safety instructions

1.2.1 Intended use

The **GARDENA Irrigation Computer** is intended for private use in domestic and hobby gardens and is only to be used outdoors to control MDS irrigation systems. It must not be used in industrial applications or in combination with chemicals, foodstuffs or flammable or explosive substances.

1.2.2 Safety instructions for batteries

- Keep the batteries away from children.
- Check the batteries regularly for damage.
- Do not use damaged batteries.
- Only use batteries of the same type, brand and state of charge.
- Replace the battery if the battery symbol is red or orange.
This prevents the irrigation computer from failing when not in use.

1.2.3 Additional electrical safety instructions



DANGER!

Risk of cardiac arrest!

This product generates an electromagnetic field during operation. This field can affect the functionality of active or passive medical implants and cause serious or fatal injuries (e.g. in the case of a pacemaker).

→ Consult your doctor and the manufacturer of your implant before using this product.

→ Mount the irrigation computer vertically on the union nut on the rain water tank.

This prevents water from entering the battery compartment.

1.2.4 Additional personal safety instructions



DANGER!

Risk of injury!

Risk of injury and risk of damage to the product.

→ Do not use running water or a water jet (especially a high-pressure water jet) to clean the product.

→ Do not clean with chemicals, including petrol or solvents. Some can destroy critical plastic parts.

The temperature of the water flowing through must not exceed 30 °C.

Only use the product at an operating pressure of 2 to 6 bar.

→ Avoid placing tensile stress on the hose (do not pull on the connected hose).


2.1 Batteries

The batteries are not included in the scope of delivery.

The battery life is approximately one year. The battery life can vary depending on ambient temperature and frequency of program use.

Suitable batteries: 1.5 V alkaline manganese (alkaline), type AA (IEC LR6).

2.1.1 LED display for the batteries

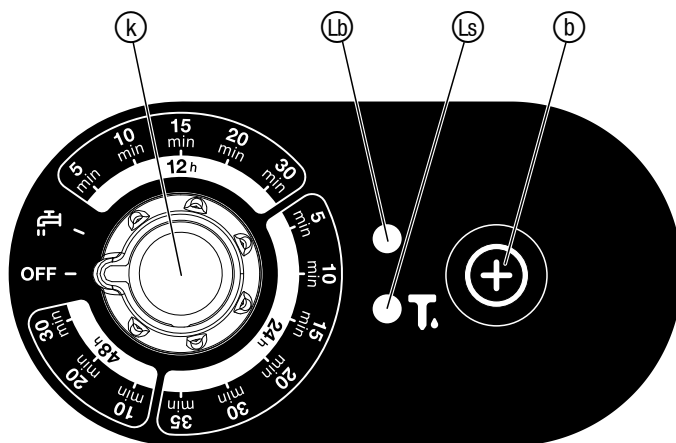

The colour of the LED  indicates the state of charge of the batteries.

Colour 	State of charge	Action
Green	Batteries OK.	–
Orange (3 x every 10 sec)	Batteries low.	→ Replace batteries.
Red (3 x every 10 sec)	Batteries flat.	→ Replace batteries.

Note:

During manual irrigation, the LED  flashes two times at startup corresponding to the state of charge.

 Red: Batteries flat, the valve can no longer be opened. However, an open valve will be securely closed.

→ Do not remove the battery when irrigation is active, otherwise the valve's electrical connection will be interrupted and the valve will remain open.

2.2 DuoTap on rain water tank

The DuoTap is intended for installation on a rain water tank (not included in the scope of delivery).

The water supply must be provided by an automatic pump (min. 2 bar outlet pressure, not included in delivery).

The **GARDENA Automatic Pump Art. No. 1766** is recommended.

The **GARDENA Battery Rainwater Tank Pump 2400 ComfortAutomatic 18V P4A Art. No. 14605** must not be used.


The **GARDENA Pump Connection Set Art. No. 16505** is recommended.

2.3 Soil moisture sensor

To incorporate soil moisture, the **GARDENA Soil Moisture Sensor Art. No. 1867** must be connected.

If the sensor detects moisture, automatic irrigation is disabled.

2.3.1 LED display for the soil moisture sensor

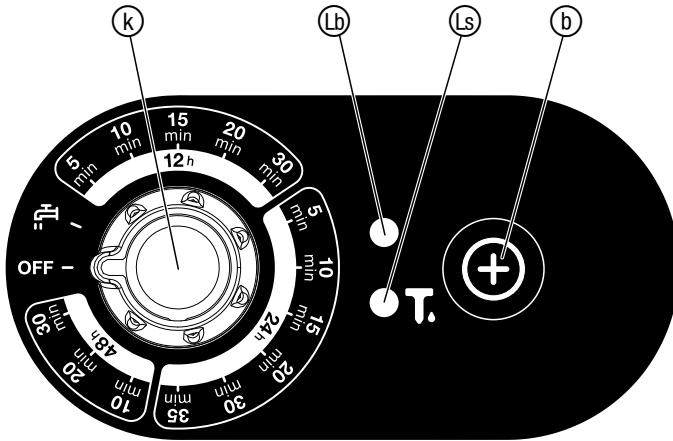

If the LED (L₅) flashes red three times, the soil moisture sensor battery is flat and must be replaced.

2.4 Operation

The DuoTap is equipped with a manual valve (tap)  and an automatic valve. We recommend not using both outputs at the same time.

2.4.1 Automatic irrigation

The flow rate for optimal functioning of the irrigation computer is between 80 and 160 l/h.

For optimal irrigation, we recommend a combination of 13 mm distribution pipe and 4.6 mm (3/16") application pipe. This allows an application rate of up to 160 l/h to be achieved.

If only a 4.6 mm (3/16") pot pipe/distribution pipe is used, a lower application rate is possible.

At flow rates below 80 l/h, irrigation is briefly interrupted at regular intervals.

→ **Remedy:** Connect more drippers to increase the flow rate and adjust the irrigation duration if necessary.

Recommended Micro-Drip-Sets:

- 1362-20 Drip tube 4.6 mm (3/16"), 15 m
- 13400-20 Drip irrigation set for terrace
- 13500-20 Drip irrigation set for hedges/bushes (25 m)
- 14455-20 Drip irrigation set for raised beds/flower beds

The irrigation program for automatic irrigation is selected using the rotary knob .

The **irrigation frequency** is selected using the **inner grey scale** in hours (h).

The **irrigation duration** is selected using the **outer black scale** in minutes (min).

2.4.2 Changing the start time

After a program has been selected, the start time can be adjusted in hourly increments within 3 seconds using the ⓑ button (max. + 23 hours).

Each time you press the ⓑ button, the start time is postponed by one hour.

2.4.3 Child lock

The DuoTap can be protected against accidental operation by children (see “4.3 Activating/deactivating the childproof lock”).


2.4.4 Irrigation recommendations

The water requirements depend on:

- Type and age of plants
- Root type (shallow/deep)
- Location (shady/sunny)
- Soil type (light/heavy)

Plant type	Irrigation system	Irrigation frequency
Pot plants/beds	Micro-Drip-System	12 – 24 hours
Hedges/bushes	Micro-Drip-System	24 – 48 hours


3.1 Inserting the batteries

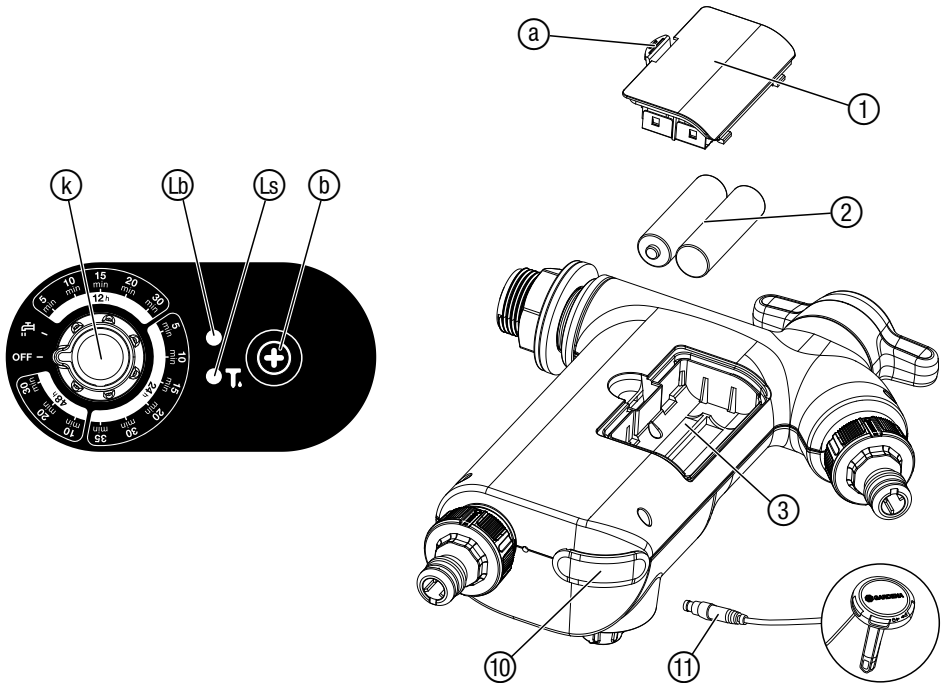

1. Turn the rotary knob (k) to “**OFF**”.
2. Push the locking mechanism (a) and remove the battery cover (1).
3. Insert 2x AA batteries (2) into the battery compartment (3). Note the polarity +/–.
4. Replace the battery cover (1).

The LED (b) flashes green once. The irrigation computer is ready for operation.


3.2 Installing DuoTap on a rain water tank

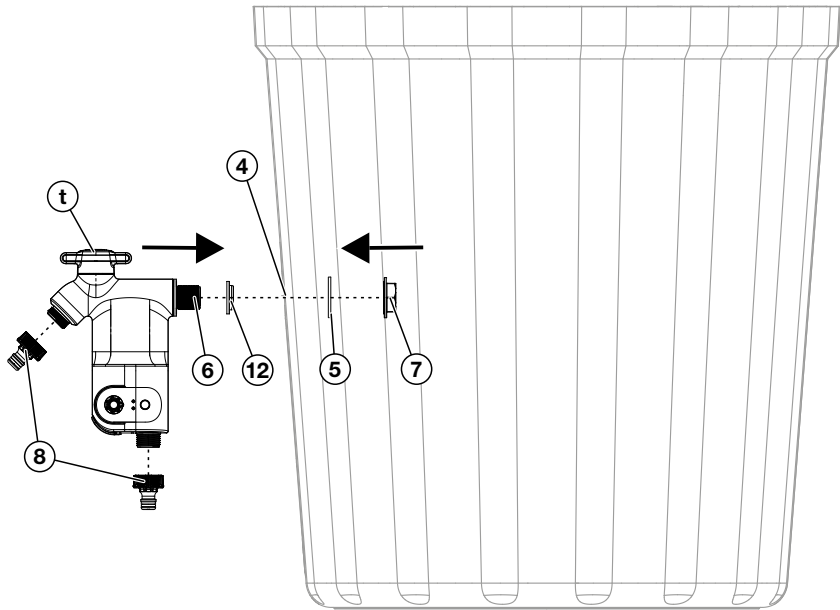

1. Choose a flat surface ④ on the rain water tank for connecting the DuoTap (if available, use the rain water tank's connection surface for accessories).
2. Drill a hole in the connection surface ④ using a 27 mm hole saw.
3. Make sure that the seal ⑫ is pushed fully onto the inlet ⑥ of the DuoTap.
4. Slide the inlet ⑥ of the DuoTap from the outside through the opening ④ in the rain water tank.
5. Slide the seal ⑤ from the inside onto the inlet ⑥.
6. Screw the nut ⑦ from the inside onto the inlet ⑥.
7. Screw the two tap connectors ⑧ onto the outlets.
8. Connect the water pump to the inlet ⑥ of the DuoTap.

The DuoTap is ready for operation.

3.3 Connecting the soil moisture sensor

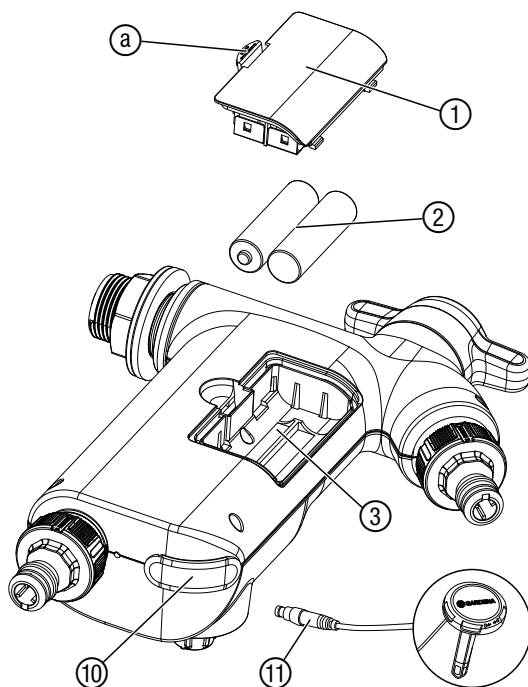


1. Open the rubber cap ⑩.
2. Insert the soil moisture sensor cable ⑪ into the connection socket of the DuoTap.

The LED ⑬ lights up green for 2 seconds.

4. OPERATION

4.1 Automatic irrigation

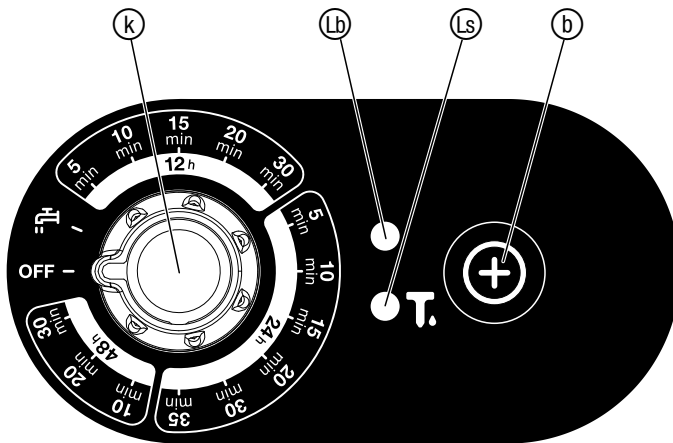

→ Select the desired program using the rotary knob (k).

The LED (Lb) lights up and initial irrigation starts.

The start time is now fixed and is retained even if another program is selected.

4.1.1 Changing the start time

→ Press the “+” button (b) within 3 seconds, several times if necessary.


The LED (Lb) lights up green and the start time is changed accordingly.

4.1.2 Resetting the start time

→ Turn the rotary knob (k) to “OFF”.

The start time is reset and will be fixed again when a new program is selected.


4.2 Manual irrigation

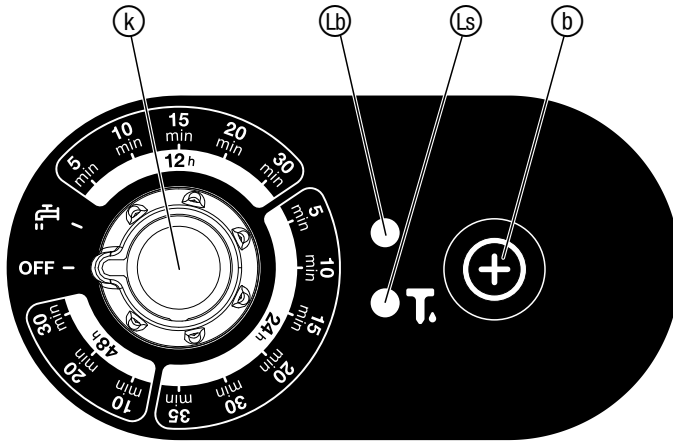

→ Turn the rotary knob (k) to the “tap”.

The LED (Lb) flashes two times, manual irrigation starts and lasts 10 minutes.

4.3 Activating/deactivating the childproof lock

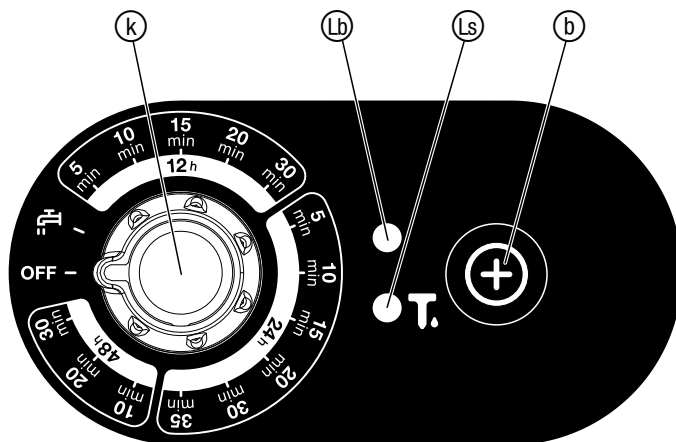

4.3.1 Activating the childproof lock

→ Press the button **b** for more than 4 seconds.

*The LED **Lb** lights up orange for 2 seconds and the childproof lock is activated.*

4.3.2 Deactivating the childproof lock

→ Press the button **b** again for more than 4 seconds.

*The LED **Lb** lights up green for 2 seconds and the childproof lock is deactivated.*


5. STORAGE

The DuoTap is not resistant to frost (below 5 °C).

1. Empty the rain water tank.
2. Unscrew the DuoTap from the rain water tank.
3. Remove the batteries.
4. Store the DuoTap in a dry, frost-free location.
5. Store the DuoTap out of the reach of children.

6. MAINTENANCE

6.1 Cleaning the dirt filter

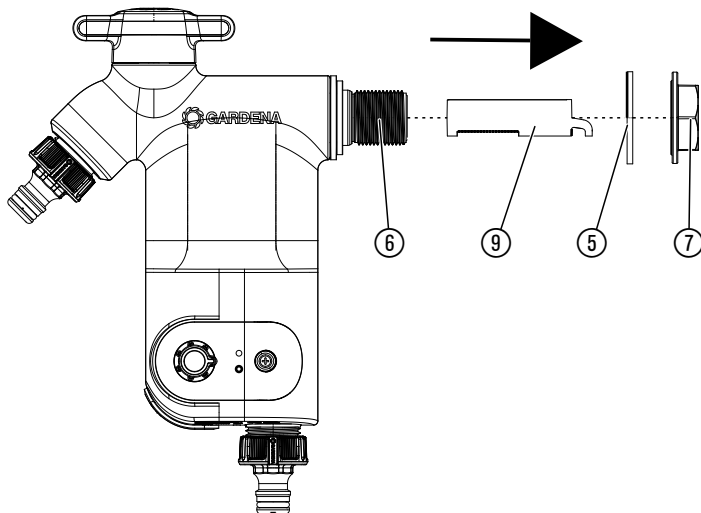

To clean the dirt filter ⑨, the rain barrel should be emptied down to the hole.

1. Disconnect the hose from the DuoTap.
2. Unscrew the tap piece.
3. Remove the dirt filter ⑨ and clean it.
4. Push the dirt filter ⑨ back in as far as it will go.

We recommend cleaning the dirt filter ⑨ when starting up and during winter storage.

6.2 Cleaning the DuoTap

→ Clean the DuoTap with a soft, damp cloth.

7. TROUBLESHOOTING

Problem	Possible cause	Remedy
Watering is not possible	Flat battery: LED flashes red.	→ Insert two new 1.5 V alkaline manganese (alkaline) batteries, type AA (IEC LR6).
	Filter dirty, flow rate too low.	→ Clean the filter.
	Child lock is activated.	→ Deactivate the child lock.
DuoTap does not close	Valve dirty.	→ Rinse against the direction of flow.

NOTE:

For any other malfunctions please contact the GARDENA service department. Repairs must only be done by GARDENA service departments or specialist dealers approved by GARDENA.

8. TECHNICAL DATA

DuoTap	Unit	Value (Art. No. 16510)
Min./max. operating pressure	bar	2 – 6
Operating temperature range	°C	5 – 50
Conveyed liquid		filtered rainwater
Max. liquid temperature	°C	30
Batteries		2x 1.5 V alkaline manganese (alkaline), type AA (IEC LR6)

9. ACCESSORIES/SPARE PARTS

GARDENA Automatic Pump	For pumping from the rain water tank.	Art. No. 1766
GARDENA Soil moisture sensor	For incorporating soil moisture in the irrigation system.	Art. No. 1867
GARDENA Pump Connection Set	For connecting the pump to the DuoTap.	Art. No. 16505

10. SERVICE/WARRANTY

10.1 Service

The current contact information for our service department can be found online:

www.gardena.com/contact

10.2 Warranty

The manufacturer's warranty is subject to the warranty conditions and is available at:

www.gardena.com/warranty

11.1 To dispose of the product



The symbol means that the product is not domestic waste. Recycle it through your local collection system for electrical and electronic equipment.

This contributes to proper end of life waste management. Contact local authorities, domestic waste services, your GARDENA servicing dealer or retailer for information. Incorrect disposal may have potential negative effects on the environment and human health, due to the potential presence of hazardous substances.

11.2 To dispose of the batteries



The batteries must not be disposed of with normal household waste. They must be disposed of in line with local environmental regulations.

1. Remove the batteries from the product.
2. Keep batteries away from children.
3. Ensure that the battery contacts do not short-circuit by placing tape over them.
4. Only dispose of the batteries when they are discharged.
5. Dispose of or recycle the batteries in accordance with the applicable local environmental regulations.

Deutschland / Germany
GARDENA Manufacturing GmbH
Central Service
Hans-Lorenser-Straße 40
D-89079 Ulm
Produktfragen:
(+49) 731 490-123
Reparaturen:
(+49) 731 490-290
www.gardena.com/de/kontakt

Albania
KRAFT SHPK
Autostrada Tirane-Durres
Km 7
1051 Tirane
Phone: (+355) 69 877 7821
info@kraft.al

Argentina
ROBERTO C. RUMBO S.R.L.
Predio Norlog
Lote 7
Benavidez, ZC: 1621
Buenos Aires
Phone: (+54) 11 5263-7862
ventas@rumbosrl.com.ar

Armenia
AES Systems LLC
Marshall Babajanyan Avenue 56/2
0022 Yerevan
Phone: (+374) 60 651 651
massisohanyan@icloud.com

Australia
Husqvarna Australia Pty. Ltd.
Locked Bag 5
Central Coast BC
NSW 2252
Phone: (+61) (0) 2 4352 7400
customer.service@husqvarna.com.au

Austria / Österreich
Husqvarna Austria GmbH
Industriezeile 36
4010 Linz
Tel.: (+43) 732 77 01 01-485
www.gardena.com/at/service/beratung/
kontakt/

Azerbaijan
Progres Xisusi Firmasi
Aliyar Aliyev 212, Baku, Azerbaijan
Sales: +994 70 326 07 14
Aftersales: +994 77 326 07 14
www.progress-garden.az
info@progress-garden.az

Bahrain
M.H. Al-Mahroos
BUILDING 208, BLOCK 356,
ROAD 328
Salhiya
Phone: +973 1740 8090
almahroos@almahroos.com

Belarus / Беларусь
ООО «Мастер Гарден»
220118, г. Минск,
улица Шаранговича, дом 7а
Тел. (+375) 17 257 00 33
mg@mastergarden.by

Belgium
Husqvarna Belgium nv
Gardena Division
Leuvensesteenweg 542
Planet II E
1930 Zaventem
België

Bosnia / Herzegovina
Silk Trade d.o.o.
Poslovna Zona Vila Br. 20
Phone: (+387) 61 165 593
info@silkttrade.com.ba

Brazil
Nordtech Maquinas e Motores Ltd.
Avenida Juscelino Kubitschek
de Oliveira Curitiba
3003 Brazil
Phone: (+55) 41 3595-9600
contato@nordtech.com.br
www.nordtech.com.br

Bulgaria
AGROLAND България АД
бул. 8 Декември, № 13
Общ. 5
1700 Студентски град
София
Тел.: (+359) 24 66 6910
info@agroland.eu

Canada / USA
GARDENA Canada Ltd.
125 Edgeware Road
Unit 15 A
Brampton L6Y 0P5
ON, Canada
Phone: (+1) 905 792 93 30
gardena.customerservice@husqvar-
nagroup.com

Chile
REPRESENTACIONES JCE S.A.
AV. DEL VALLE NORTE 857 PISO 4
HUECHURABA, SANTIAGO, CHILE
Phone: (+56) 2 2414 2600
contacto@jce.cl

China
办公室地址:
上海市长宁区金钟路788号荟聚办
公楼D栋7楼03-05单元
Office Add:
Unit3-5, 7F, Livat Tower D, No.788,
Jin Zhong Rd., Chang Ning Dist.,
Shanghai, PRC 200335

Colombia
Equipos de Toyama Colombia SAS
Cra. 68 D No 25 B 86 Of. 618
Edificio Torre Central
Bogota
Phone: +57 (1) 703 95 20 /
+57 (1) 703 95 22
serviciocliente@toyama.com.co
www.toyama.com.co

Costa Rica
Exim CIA Costa Rica
Calle 25A, B*, Montealegre
Zapote
San José
Costa Rica
Phone: (+506) 2221-5654 / (+506)
2221-5659
eximcostarica@gmail.com

Croatia
Husqvarna Austria GmbH
Industriezeile 36
4010 Linz
Phone: (+43) 732 77 01 01-485
service.gardena@husqvarnagroup.com

Cyprus
Pantelis Papadopoulos S.A.
92 Athinou Avenue
Athens
10442 Greece
Phone: (+30) 21 0519 3100
info@papadopoulos.com.gr

Czech Republic
Gardena
Service Center Vrbno
c/o Husqvarna
Manufacturing CZ s.r.o.
Jesenická 146
79326 Vrbno pod Prádemem
Phone: 800 100 425
servis@gardena.cz

Denmark
GARDENA DANMARK
Løjrevej 19, st.
3500 Værløse
Tlf.: (+45) 70 26 47 70
gardenadk@husqvarnagroup.com
www.gardena.com/dk

Dominican Republic
BOSQUESA S.R.L.
Carretera Santiago Licey
Km. 5 ½
Esquina Copal II
Santiago De Los Caballeros
51000 Dominican Republic
Phone: (+1) 809-562-0476
contacto@bosquesa.com.do

Egypt
Universal Agencies Co
26, Abdel Hamid Lofly St.
Giza
Phone: (+20) 3 761 57 57

Estonia
Husqvarna Eesti OÜ
Valdeku 132
EE-12116 Tallinn
info@gardena.ee

Finland
Oy Husqvarna Ab
Juurakkotie 5 B 2
01510 Vantaa
www.gardena.fi

France
Husqvarna France
9/11 Allée des pierres mayettes
92635 Gennevilliers Cedex
France
http://www.gardena.com/fr
N° AZUR: 0 810 00 78 23
(Prix d'un appel local)

Georgia
Transporter LLC
#70, Beliashtvili street
0159 Tbilisi, Georgia
Number: (+995) 322 14 71 71
info@transporter.com.ge
www.transporter.com.ge

**Service Address and
Importer to Great Britain**
Husqvarna UK Ltd
Preston Road
Aycliffe Industrial Park
Newton Aycliffe
County Durham
DL5 6UP
Phone: (+44) (0) 344 844 4558
info.gardena@husqvarna.co.uk

Greece
Π.ΠΑΠΑΔΟΠΟΥΛΟΣ ΑΕΒΕ
Λεωφ. Αθηνών 92
Αθήνα
Τ.Κ. 104 42
ΕΜΔΟΔ
Τηλ. (+30) 210 5193 100
info@papadopoulos.com.gr

Hong Kong
Tung Tai Company
151-153 Hoi Bun Road
Kwun Tong, Kowloon
Hong Kong
Phone: (+852) 3583 1662
admin@tungtaico.com

Hungary
Husqvarna Magyarország Kft.
Ezred u. 1 – 3
1044 Budapest
Phone: (+36) 1 251-4161
vevozolgalat.husqvarna@husqvarna-
group.com

Iceland
BYKO ehf.
Skemmuvegi 2a
200 Kópavogur
Phone: (+354) 515 4000
byko@byko.is

MHG Verslun ehf
Vikurhvarf 8
203 Kópavogur
Phone: (+354) 544 4656

India
B K RAMAN AND CO
Plot No. 185, Industrial Area,
Phase-2, Ram Darbar
Chandigarh
160002 India
Phone: (+91) 98140 06530
raman@jagandhardware.com

Iraq
Alshiemal Alakhdar Company
Al-Faysaleiah, Near Estate Bank
Mosul
Phone: (+964) 78 18 46 75

Ireland
Liffey Distributors Ltd.
309 NW Business Park, Ballycoolen
15 Dublin
Phone: (+353) 1 824 2600
info@liffeyd.com

Israel
HAGARIN LTD.
2 Nahal Harif St.
8122201 Yavne
internet@hagarin.co.il
Phone: (+972) 8-932-0400

Italy
Husqvarna Italia S.p.A.
Centro Direzionale Planum
Via del Lavoro 2, Scala B
22036 ERBA (CO)
Phone: (+39) (0) 31 4147700
assistenza.italia@it.husqvarna.com

Japan
Husqvarna Zenoah Co. Ltd. Japan
1-9 Minamidai, Kawagoe
350-1165 Saitama
Japan
gardena-jp@husqvarnagroup.com

Kazakhstan
ТОО «Іламд»
Russian
Адрес: Казахстан, г. Алматы,
ул. Тажикбаевой, 155/1
Тел.: (+7) (727) 355 64 00 /
(+7) (700) 355 64 00
lamed@lamed.kz

Kazakh
Мекен-жайы: Қазақстан,
Алматы қ.,
көш. Тажикбаевой, 155/1
Тел.: (+7) (727) 355 64 00 /
(+7) (700) 355 64 00
lamed@lamed.kz

Kuwait
Palms Agro Production Co
Al Rai- Fourth Ring Road – Block 56.
P.O Box: 1976 Safat
13020 Al-Rai
Phone: (+965) 24 73 07 45
info@palms-kw.com

Kyrgyzstan
ООО Айе Макі
Av. Molodaya Guardia 83
720014 Bishkek
Phone: (+996) 312 322115

Latvia
Husqvarna Latvija SIA
Ulbrokas 19A
LV-1021 Riga
info@gardena.lv

Lebanon
Technomec
Safra Highway (Beirut – Tripoli) Center
622 Mezher Bldg.
P.O.Box 215
Jounieh
Phone: (+961) 9 853527 /
(+961) 3 855481
tecnomec@idm.net.lb

Lithuania
UAB Husqvarna Lietuva
Ateities pl. 77C
LT-52104 Kaunas
info@gardena.lt

Luxembourg

Magasins Jules Neuberger
39, rue Jacques Stas
Luxembourg-Gasperich 2549
Case Postale No. 12
Luxembourg 2010
Phone: (+352) 40 14 01
api@neuberger.lu

Malaysia

Glomedic International Sdn Bhd
Jalan Ruang No. 30
Shah Alam, Selangor
40150 Malaysia
Phone: (+60) 3-7734 7997
oase@glomedic.com.my

Malta

I.V. Portelli & Sons Ltd.
85, 86, Triq San Pawl
Rabat - RBT 1240
Phone: (+356) 2145 4289

Mauritius

Espace Maison Liée
La City Trianon, St Jean
Quatre Bornes
Phone: (+230) 460 85 85
digital@espacemaison.mu

Mexico

AFOSA
Av. Lopez Mateos Sur # 5019
Col. La Calma 45070
Zapopan, Jalisco, Mexico
Phone: (+52) 33 3818-3434
isolis@afosa.com.mx

Moldova

Convel SRL
Republica Moldova,
mun. Chisinau,
sos. Muncești 284
Phone: (+373) 22 857 126
www.convel.md

Mongolia

Soyol Gardening Shop
Namiir Rd
Ulaanbaatar
14230 Mongolia
Phone: +976 7777 5080
soyol@magicnet.mn

Morocco

Proekip
64 Rue de la Participation
Casablanca-Roches Noires
20303 Morocco
Phone: (+212) 661342107
hicham.hafani@proekip.ma

Netherlands

Husqvarna Nederland B.V.
GARDENA Division
Postbus 50131
1305 AC ALMERE
Phone: (+31) 36 521 00 10
info@gardena.nl

Neth. Antilles

Jonka Enterprises N.V.
Sta. Rosa Weg 196
P.O. Box 8200
Curaçao
Phone: (+599) 9 767 66 55
info@gardena.com

New Zealand

Husqvarna New Zealand Ltd.
PO Box 76-437
Manukau City 2241
Phone: (+64) (0) 9 9202410
support.nz@husqvarna.co.nz

North Macedonia

Sinpeks d.o.o.
Ul. Kravarski Pat Bb
7000 Bitola
Phone: (+389) 47 20 85 00
sinpeks@mt.net.mk

Norway

Husqvarna Norge AS
Gardena Division
Traskerveien 36
1708 Sarpsborg
info@gardena.no

Northern Cyprus

Mediterranean Home & Garden
No 150 Alaskica, Karaoglanoglu
Caddesi Gime
Phone: (+90) 392 821 33 80
info@medgardener.com

Oman

General Development Services
PO 1475, PC - 111
Seeb
111 Oman
Phone: 96824582816
gdsoman@gdsoman.com

Paraguay

Agrofield SRL
AV. CHOFERES DEL CHACO
1449 C/25 DE MAYO
Asunción
Phone: (+595) 21 608 656
consultas@agrofield.com.py

Peru

Sieras y Herramientas Forestal SAC
Av. Las Gaviotas 833, Chorrillos
Lima
Phone: (+51) 1 2 52 02 52
supervisorventas1@siersac.com
www.siersac.com

Philippines

Royal Dragon Traders Inc
10 Linaw Street, Barangay
Saint Peter Quezon City
1114 Philippines
Phone: (+63) 2 7426893
aida.fernandez@rdti.com.ph

Poland

Gardena Service Center Vrbno
c/o Husqvarna Manufacturing CZ
s.r.o. Jesenická 146
79326 Vrbno pod Prádemem
Czech Republic
Phone: (22) 336 78 90
servis@gardena.pl

Portugal

Husqvarna Portugal, SA
Lagaa - Albarraque
2635 - 595 Rio de Mouro
Phone: (+351) 21 922 85 30
Fax: (+351) 21 922 85 36
info@gardena.pt

Romania

Madex International Srl
Soseaua Odail 117 - 123,
RO 013603 Bucuresti, S1
Phone: (+40) 21 352 7603
madex@ines.ro

Russia / Россия

000 „Хускварна“
141400, Московская обл.,
г. Химки,
улица Ленинградская,
автомоб. 39, стр.6
Бизнес Центр
„Химки Бизнес Парк“,
помещение 0802_04
http://www.gardena.ru

Saudi Arabia

SACO
Takhassusi Main Road P.O. Box:
86387 Riyadh 12863
40011 Saudi Arabia
Phone: (966) 11 482 8877
webmaster@saco-ksa.com

Al Futtaim Pioneer Trading
5147 Al Farooq Dist.
Riyadh 7991
Phone: (+971) 4 206 6700
Owais.Khan@alfuttaim.com

Serbia

Domel d.o.o.
Slobodana Đurića 21
11000 Belgrade
Phone: (+381) 11 409 57 12
office@domel.rs

Singapore

Hy-Ray PRIVATE LIMITED
40 Jalan Pemimpin
#02-08 Tat Ann Building
Singapore 577185
Phone: (+65) 6253 2277
info@hyray.com.sg

Slovak Republic

Gardena
Service Center Vrbno
c/o Husqvarna
Manufacturing CZ s.r.o.
Jesenická 146
79326 Vrbno pod Prádemem
Phone: 0800 154044
servis@gardena.sk

Slovenia

Husqvarna Austria GmbH
Industriezeile 36
4010 Linz
Phone: (+43) 732 77 01 01-485
service.gardena@husqvarnagroup.com

South Africa

Husqvarna South Africa (Pty) Ltd
Lifestyle Business Park –
Ground Floor Block A Cnr
Beyers Naude Drive and Ysterhout
Road Randpark Ridge, Randburg
Phone: (+27) 10 015 5750
service@gardena.co.za

South Korea

Kyung Jin Trading Co., Ltd
8F Haengbok Building, 210,
Gangnam-Daero 137-891 Seoul
Phone: (+82) 2 574 6300
kjh@kjh.co.kr

Spain

Husqvarna España S.A.
Calle de Rivas nº 10
28052 Madrid
Phone: (+34) 91 708 05 00
atencioncliente@gardena.es

Sri Lanka

Hunter & Company Ltd.
130 Front Street
Colombo
Phone: 94-11 232 81 71
hunters@eureka.lk

Suriname

Deto Handelsmaatschappij N.V.
Kerkkampweg 72-74
P.O. Box: 12782
Paramaribo
Suriname
Phone: (+597) 43 80 50
info@deto.sr

Sweden

Husqvarna AB/
GARDENA Sverige
Drottningatan 2
561 82 Huskvarna
Sverige
Phone: (+46) (0) 36-14 60 02
service@gardena.se

Switzerland / Schweiz

Husqvarna Schweiz AG
Consumer Products
Industriestrasse 10
5506 Mägenwil
Phone: (+41) (0) 62 887 37 90
info@gardena.ch

Taiwan

Hong Ying Trading Co., Ltd.
No. 46 Wu-Kun-Wu Road
New Taipei City
Phone: (+886) (02) 2298 1486
salesg1@Friends.com.tw

Tajikistan

ARIERS JV LLC
39, Ayini Street, 734024
Dushanbe, Tajikistan

Thailand

Spica Co. Ltd
243/2 Onnuch Rd., Prawat
Bangkok
10250 Thailand
Phone: (+66) (0)2721 7373
surapong@spica-siam.com

Tunisia

Société du matériel agricole et maritime
Nouveau port de peche de Sfax Bp 33
Sfax 3065
Phone: (+216) 98 419047/
(+216) 74 497614
commercial@smamtunisia.com

Türkiye

Dost Bañçe
Yunus Mah. Adil Sk. No:3
Kartal
İstanbul
34873 Türkiye
Phone: (+90) 216 389 39 39

Turkmenistan

I.E. Orazmuhammedov Nurmuhammet
80 Ataturk, BERKARAR Shopping
Center,
Ground floor, A77b,
Ashgabat 744000
TURKMENISTAN
Phone: (+993) 12 468859
Mob: (+993) 62 222887
info@jayhyzmat.com /
bekgiyev@jayhyzmat.com
www.jayhyzmat.com

UAE

Al-Futtaim ACE Company
L.L.C Building, Al Rebat Street
Festival City, Dubai
7880 UAE
Phone: (+971) 4 206 6700
ace@alfuttaim.ae

Ukraine / Україна

АТ «Алусет»
вул. Петропавлівська 4
08130, Київська обл.
Києво-Святошинський р-н. с.
Петропавлівська Борщаківка Україна
Тел.: (+38) 0 800 503 000

Uruguay

FELI SA
Entre Rios 1083
11800 Montevideo
Phone: (+598) 22 03 18 44
info@felisa.com.uy

Uzbekistan

AGROHOUSE MChJ
O'zbekiston, 111112
Toshkent viloyati
Toshkent tumani
Hasanboy QFY, THAY yogasida
Phone: (+998) 93-5414141 /
(+998)-71-2096868
info@agro.house
www.agro.house

Vietnam

Vision Joint Stock Company
BT1-17, Khu biet thu –
Khu Doan ngao giao Nguyen Xuan
Khoat
Xuan Dinh, Bac Tu Liem
Hanoi, Vietnam
Phone: (+8424)-38462833/34
quynhnm@visionjsc.com.vn

Zimbabwe

Cutting Edge
159 Citroen Rd, Msasa
Harare
Phone: (+263) 8677 008685
sales@cuttingedge.co.zw

16510-20.962.03/0826
© GARDENA Manufacturing GmbH
D-89079 Ulm
https://www.gardena.com