



Operator's manual
HUSQVARNA CEORA™

Read the operator's manual carefully and make sure that you understand the instructions before you use the product.



EN, English

Contents

1 Safety	
1.1 Safety definitions.....	3
1.2 General safety instructions.....	3
1.3 Safety instructions for installation.....	4
1.4 Safety instructions for operation.....	4
1.5 Safety instructions for maintenance.....	4
1.6 Battery safety.....	4
1.7 To lift and move the product.....	5
2 Introduction	
2.1 Support.....	6
2.2 Product description.....	6
2.3 System description.....	6
2.4 System overview.....	7
2.5 Product overview drive unit, CEORA™ 544/546 EPOS.....	8
2.6 Product overview cutting deck, CEORA™ Razor 43M.....	8
2.7 Product overview charging station, CEORA™ CS4.....	9
2.8 Control panel overview.....	10
2.9 LED indicator on the product.....	10
2.10 Symbols on the product.....	11
2.11 Symbols on the battery.....	11
2.12 Symbols in the Automower® Connect app.....	11
2.13 General manual instructions.....	12
3 Installation	
3.1 Introduction - Installation.....	13
3.2 Primary components for installation.....	13
3.3 To prepare for installation.....	13
3.4 To examine where to put the reference station... 13	
3.5 To examine where to put the charging station... 13	
3.6 To examine where to install the objects on the map.....	15
3.7 Installation of the product.....	16
3.8 Settings.....	23
4 Operation	
4.1 To set the product to ON.....	26
4.2 To start the product.....	26
4.3 To select operation mode.....	26
4.4 appDrive	26
4.5 Work area selection.....	26
4.6 Operation mode Pause.....	26
4.7 Operation mode Park.....	27
4.8 Operation mode Park at Maintenance point.....	27
4.9 To stop the product.....	27
4.10 To set the product to OFF.....	27
4.11 To charge the battery.....	27
4.12 To release the wheel brakes and move the product.....	28
5 Maintenance	
5.1 Introduction - maintenance.....	29
5.2 Maintenance schedule.....	29
5.3 To put the cutting deck in service position.....	31
5.4 To put the cutting deck in cut position.....	31
5.5 Clean the product.....	32
5.6 Replacement of the blades and blade discs.....	32
5.7 Adjustment of the wheel brushes.....	33
5.8 Battery.....	33
5.9 Winter service.....	34
6 Troubleshooting	
6.1 Introduction - troubleshooting.....	35
6.2 Fault messages.....	35
6.3 Information and warning messages.....	42
6.4 LED indicator lamps on the charging station.....	42
6.5 Symptoms.....	43
7 Transportation, storage and disposal	
7.1 Safety instructions for transportation.....	45
7.2 To put the product into storage.....	45
7.3 Transportation of batteries.....	45
7.4 Disposal.....	45
8 Technical data	
8.1 Technical data.....	48
8.2 Registered trademarks.....	51
9 Warranty	
9.1 Warranty terms.....	52
10 EU Declaration of Conformity	

1 Safety

1.1 Safety definitions

Warnings, cautions and notes are used to point out specially important parts of the manual.



WARNING: Used if there is a risk of injury or death for the operator or bystanders if the instructions in the manual are not obeyed.



CAUTION: Used if there is a risk of damage to the product, other materials or the adjacent area if the instructions in the manual are not obeyed.

Note: Used to give more information that is necessary in a given situation.

1.2 General safety instructions



WARNING: Read the warning instructions that follow before you use the product.

- Read the Operator's manual carefully and make sure you understand the instructions before you use the product. Keep for future reference.
- This appliance is not intended for use by children or persons with reduced physical, sensory or mental capabilities (that could affect a safe handling of the product), or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- The product must only be used with the equipment recommended Husqvarna. All other types of use are incorrect.
- Do not use the product when persons, especially children, or animals are in the work area.
- To prevent damage to the product and accidents to vehicles and persons, do not install work areas and transport paths across public pathways.
- Do not use the product in areas where persons are not aware of the product.
- Warning signs must be put around the work area of the product if it operates in public areas. The signs must have the text that follows: Warning! Automatic lawn mower! Keep away from the machine! Supervise children!
- Do not run when you operate the product manually with appDrive. Always walk, be sure on footing on slopes and make sure to have balance at all times. Always wear substantial footwear and long trousers when you operate the product with appDrive.
- Do not touch moving hazardous parts, such as the blade disc, before it has come to a complete stop.
- Set the product to OFF before you clear a blockage, do maintenance or examine the product, and if the product starts to vibrate abnormally. Examine the product for damage before you start the product again. Do not use the product to it is defective.
- If an injury or accident occur get medical aid.
- Do not install the mains cable in an area where the product cuts. Follow the instructions to install the mains cable, refer to *Installation on page 13*. Installation must be done by service personnel.
- Do not connect a damaged cable or plug, or touch a damaged cable, before it is disconnected from the power outlet. Disconnect the plug from the power outlet if the cable becomes damaged while in operation. A worn or damaged cable increases the risk of electrical shock. A damaged cable must be replaced by service personnel.
- When you connect the mains cable to the power outlet, use a residual-current device (RCD) with a tripping current of maximum 30 mA.
- Only charge the product in the included charging station. For safe disposal of the battery, refer to *Disposal on page 45*. Incorrect use may result in electric shock, overheating or leaking of corrosive liquid from the battery. In the event of leakage of electrolyte, flush with water/neutralizing agent. Get medical aid if corrosive liquid comes in your eyes.
- Use only original batteries recommended by Husqvarna. Product safety cannot be guaranteed with other than original batteries. Do not use non-rechargeable batteries.
- Follow the installation instructions that includes to specify the work area and to attach the cutting deck or other attachments, refer to *Installation on page 13*.
- Follow the instructions about to start and operate the product, refer to *Operation on page 26*.
- If there is a risk of thunderstorm, Husqvarna recommends that the mains cable to the charging station and the power supply unit to the reference station are disconnected to decrease the risk of damage to electrical components. Connect the mains cable and the power supply again if there is no longer a risk of thunderstorm.
- Follow the maintenance instructions and if necessary use Husqvarna original spare parts, refer to *Maintenance on page 29*.

- For technical data such as weight, dimensions and noise emission values, refer to *Technical data on page 48*.
- The operator is responsible for accidents or dangers that occurs to other persons or property.
- The product must only be operated, maintained and repaired by persons that are fully conversant with its special characteristics and safety regulations.
- It is not permitted to change the initial design of the product.
- Obey national regulations about electrical safety.
- Husqvarna does not guarantee full compatibility between the product and other types of wireless systems such as remote controls, radio transmitters or equivalent.
- The built-in alarm is very loud. Be careful, especially if the product is handled indoors.
- Operation, charging and storage temperature is 0-45°C / 32-113 °F. Long-term storage temperature that is more than 1 month, must be 0-25 °C / 32-77 °F.

1.3 Safety instructions for installation



WARNING: Read the warning instructions that follow before you use the product.

- Do not install the charging station in an area where there is a risk that persons trip on it.
- Do not install the charging station, including any accessory, at a location that is below, or within 60 cm / 24 in. from, any combustible material. In case of malfunction, heating of the charging station and the power supply may occur and create a potential risk of fire.
- Applicable to USA/Canada. If power supply is installed outdoors: Risk of Electric Shock. Install only to a covered Class A GFCI receptacle (RCD) that has an enclosure that is weatherproof with the attachment plug cap inserted or removed.

1.4 Safety instructions for operation



WARNING: Read the warning instructions that follow before you use the product.

- Keep your hands and feet away from the rotating blades. Do not put your hands or feet near or below the product when it is set to ON.
- Use the park mode or set the product to OFF when persons, especially children or animals are in the work area. Refer to *To set the product to OFF on page 27*. Husqvarna recommends to set the

product to operate when the work area has no activity. The product can cause injury to animals at night in work area, for example hedgehogs. Refer to *Schedule on page 23*.

- Make sure that there are no objects such as stones, branches, tools or toys on the lawn. The blades can be damaged if it hits an object.
- Do not lift the product or move it when it is set to ON.
- Do not to let the product collide with persons or animals. If a person or animal comes in the way of the product, stop the product immediately. Refer to *To stop the product on page 27*.
- Do not put objects on top of the product, the charging station or the reference station.
- Do not use the product if the **STOP** button does not work.
- Always set the product to OFF when it is not in operation. The product can only start when you enter the correct PIN code.
- Do not use the product at the same time as a pop-up sprinkler. Use the *Schedule* function so the product and pop-up sprinkler do not operate at the same time. Refer to *Schedule on page 23*.

1.5 Safety instructions for maintenance



WARNING: Read the warning instructions that follow before you do maintenance on the product.

- Set the product to **OFF** when you do maintenance on the product.
- Do not use a high-pressure washer to clean the product. Do not use solvents to clean the product.
- Disconnect the plug to the charging station before you clean or do maintenance of the charging station.

1.6 Battery safety



WARNING: Read the warning instructions that follow before you use the product.

- Lithium-ion batteries can explode or cause fire if disassembled, short-circuited, exposed to water, fire, or high temperatures. Handle carefully, do not dismantle, open the battery or use any type of electrical/mechanical abuse. Avoid storage in direct sunlight.

1.7 To lift and move the product



WARNING: The product must be set to OFF before you lift the product.

- To safely move the product from or in the work area, lift it manually or operate it with appDrive. Refer to *To lift the product manually on page 5* and *appDrive on page 26*.

1.7.1 To lift the product manually



WARNING: Two persons are necessary to lift the product.




CAUTION: Do not lift the product when it is parked in the charging station. It can cause damage to the charging station and/or the product.




CAUTION: Do not lift the product by the front handle.


- Lift the product by the handles on the sides of the cutting deck and the handles on the rear part of the drive unit.

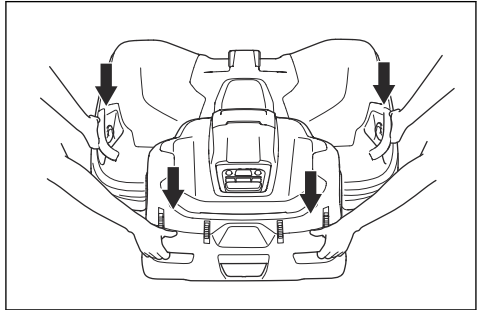

- Push the **STOP** button to stop the product.

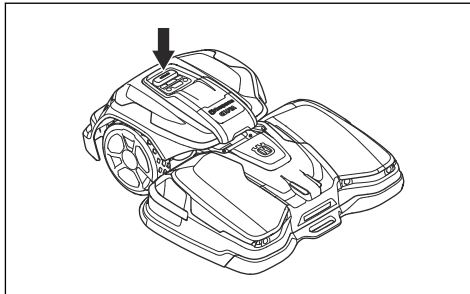

- Set the product to OFF. Refer to *To set the product to OFF on page 27*.

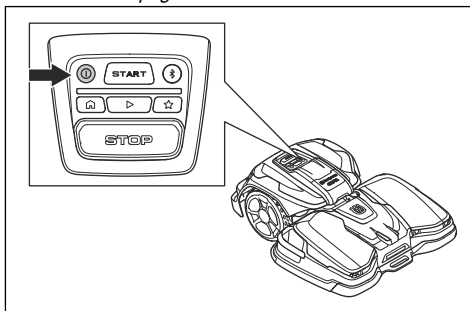

- Pull the product out of the charging station before you lift the product.

2 Introduction

Serial number:

PIN code:

The serial number is on the product rating plate and on the product carton.

2.1 Support


For support about the product, speak to your Husqvarna servicing dealer.

2.2 Product description

Note: Husqvarna regularly updates the appearance and function of the products. Refer to *Support on page 6*.

The product is a robotic lawn mower that contains a drive unit and a cutting deck. The product has a battery power source and operates automatically. The movement pattern of the product is systematic to satisfactorily cut large areas.

The work area in which the product operates is specified by the virtual boundary. The satellite receiver in the product senses when it goes near the virtual boundary.

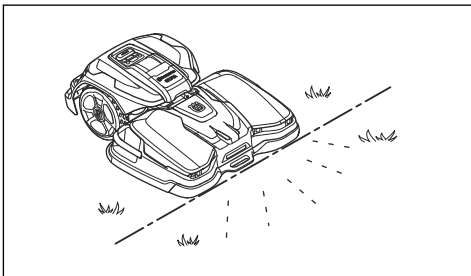

2.3 System description

The system contains a CEORA™ robotic lawn mower, a charging station and a reference station. The robotic

lawn mower and reference station uses the EPOS (Exact Positioning Operating System) technology with satellite signals to position the robotic lawn mower correctly, this means that boundary wires are not necessary. The reference station is stationary and sends correction data to the robotic lawn mower to get an accurate position of the robotic lawn mower. The virtual work area for the product is made in the Automower® Connect app. The product is operated and waypoints are added to make a map in the app. Refer to *System overview on page 7*.

2.3.1 Find the charging station


The product operates until the battery state of charge is low or until the work area is cut, then the product starts to go to the charging station. The product uses EPOS guidance with satellite signals to find a path to the charging station. This decreases the wear on the lawn and the time to find the charging station.

2.3.2 Connectivity

Husqvarna Fleet Services™ is a cloud solution that is available as an app and on the web on www.husqvarna.com. You can add all your products to Husqvarna Fleet Services™ to get an overview and control the products. Refer to *Husqvarna Fleet Services™ on page 19*.

Automower® Connect is an app that you can use to install the product and to select the operation settings of the product. Refer to *Automower® Connect on page 18*.

2.4 System overview

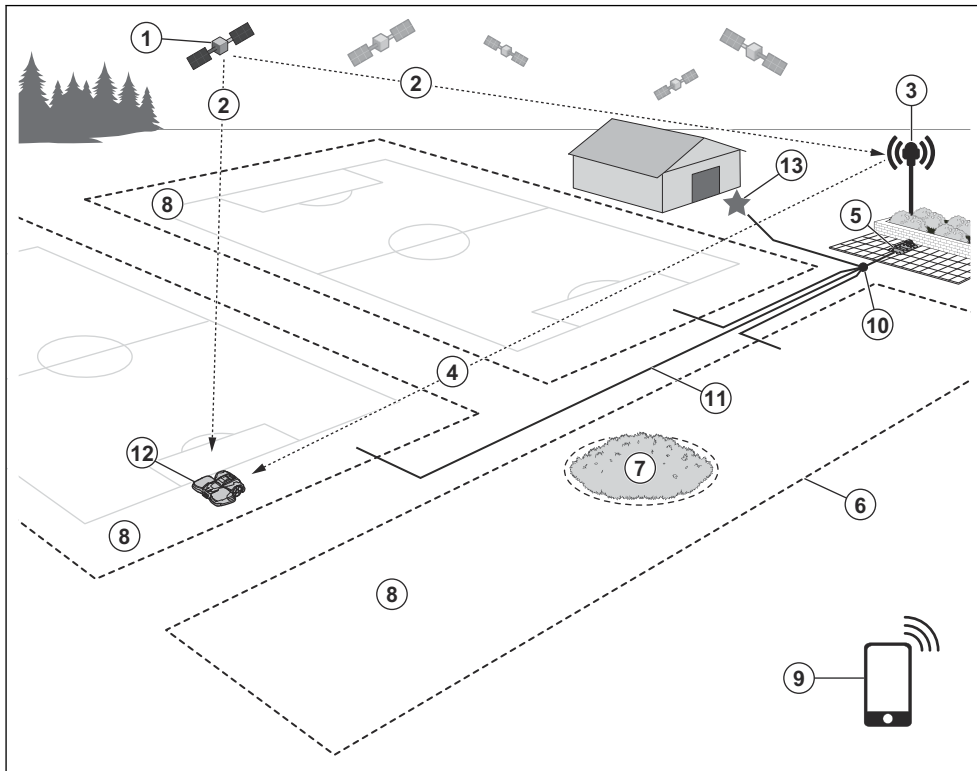


- | | |
|-----------------------------------|-------------------------------|
| 1. Satellites | 5. Work area |
| 2. Satellite signals | 9. Mobile device ² |
| 3. Reference station ¹ | 10. Docking point |
| 4. Correction data | 11. Transport path |
| 5. Charging station | 12. Robotic lawn mower |
| 6. Virtual boundary | 13. Maintenance point |
| 7. Stay-out zone | |

¹ Not included.


² Not included.

2.5 Product overview drive unit, CEORA™ 544/546 EPOS

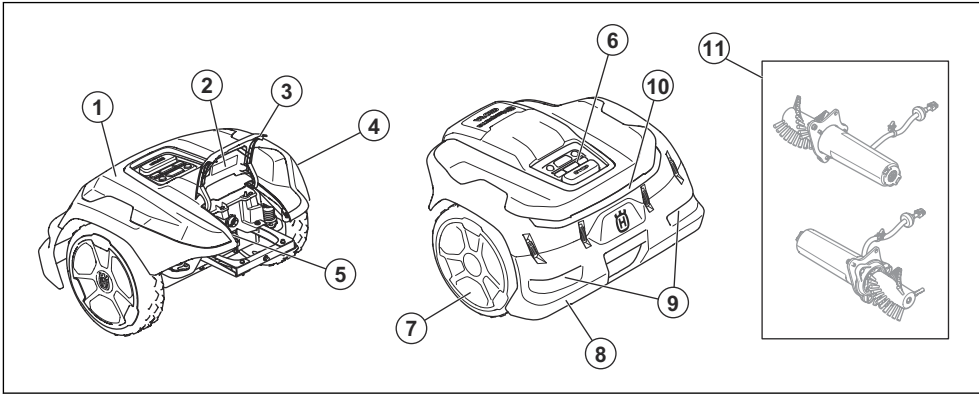

- | | |
|--------------------------------|---|
| 1. Drive unit (DU) | 7. Drive wheels |
| 2. Rating plate drive unit | 8. Rear bumper |
| 3. Hatch | 9. Rear handles |
| 4. Drive unit body | 10. Rear safety lights |
| 5. USB outlet for service tool | 11. Active wheel brush kit ³ |
| 6. Control panel | |


2.6 Product overview cutting deck, CEORA™ Razor 43M

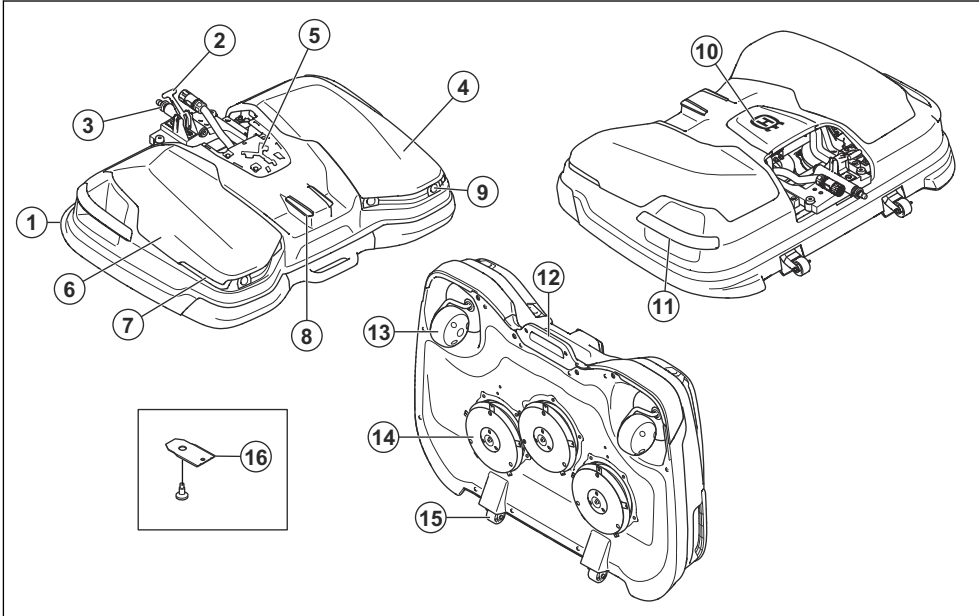

³ Is available as accessory.

1. Cutting deck (CD)
2. Lever
3. Shaft
4. Rating plate of the cutting deck⁴
5. Combi tool⁵
6. Cutting deck body
7. Front safety lights
8. Charging plates
9. Ultrasonic sensors
10. Center top cover
11. Side handles
12. Front handle
13. Front wheels
14. Blade disc, blades, skid plate
15. Service wheels
16. Blades and screws

2.7 Product overview charging station, CEORA™ CS4

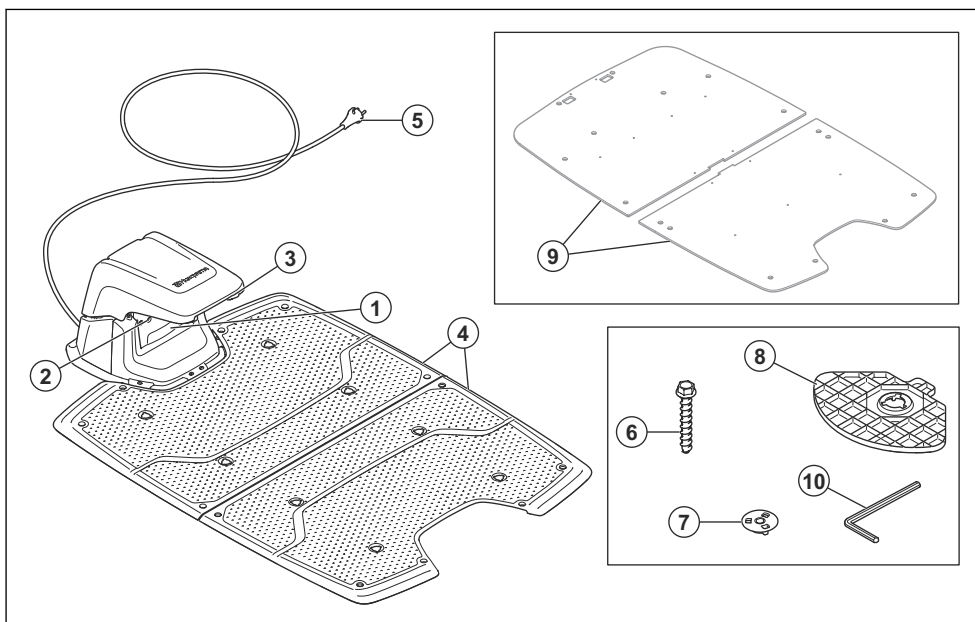

1. Rating plate of the charging station
2. LED indicators of the charging station
3. Contact plates
4. Baseplates
5. Mains cable⁶
6. Screws to attach the charging station
7. Coupling
8. Support plates
9. Support plate for soft surface⁷
10. Hex key


⁴ Found below the top cover.

⁵ Found below the center top cover.

⁶ The appearance can be different for different markets.

⁷ Is available as accessory.

2.8 Control panel overview

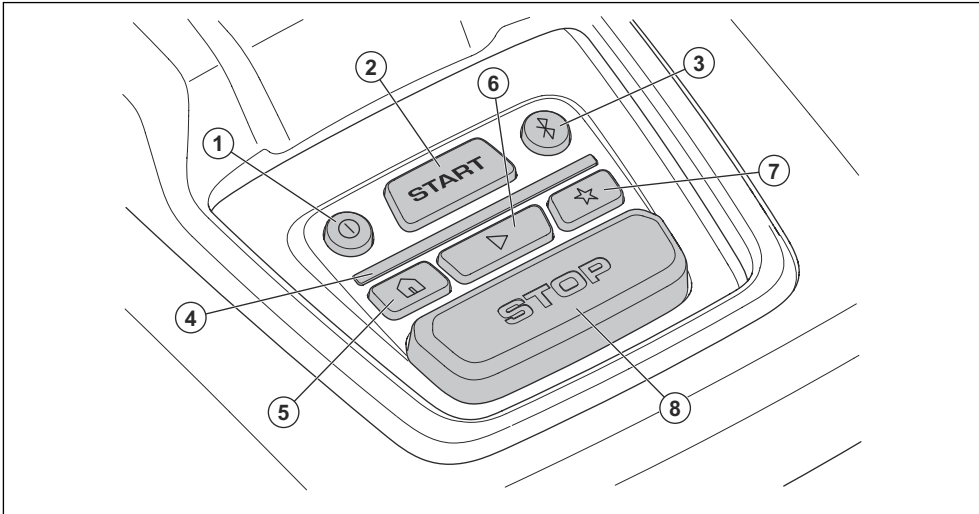

- | | |
|----------------------|-----------------------------|
| 1. ON/OFF button | 6. Play button |
| 2. START button | 7. Maintenance point button |
| 3. Bluetooth® button | 8. STOP button |
| 4. LED indicator | |
| 5. Park button | |

2.9 LED indicator on the product

The LED indicator on the control panel of the product shows the current product status:

LED indicator light	Product status
Constant green	The product cuts the lawn or moves out of the charging station.
Flashes green	The product is in <i>Pause</i> mode.
Flashes red	The product stopped because of an error.
Constant yellow	The STOP button was pushed.
Flashes yellow	The PIN code must be entered to start the product.
Constant blue	The product moves to the charging station or a maintenance point. An app is connected to the product with Bluetooth®, the LED indicator is constant blue for 3 seconds.
Pulsates blue	The product charges in the charging station.
Flashes blue	The product is parked in charging station. The product can at this time find Bluetooth® and connect with Bluetooth®.
Constant white	The product is in appDrive mode.

LED indicator light	Product status
Pulsates white	The product sets to OFF.
	Firmware installation is in progress.
Flashes white	New firmware must be installed.

There is more information on www.husqvarna.com. Speak to your local Husqvarna representative for more information.

2.10 Symbols on the product

These symbols can be found on the product. Make sure that you understand them.



WARNING: Read the operator instructions before you operate the product.




WARNING: Disable the product before maintenance or before you lift the product.



WARNING: Keep a safe distance from the product when it is in operation. Keep your hands and feet away from the rotating blades of the product.



WARNING: Do not sit on the product. Do not put your hands or feet near or below the product.



Use a detachable power supply as specified on the rating plate adjacent to the symbol.



This product complies with the applicable EU Directives.



This product complies with the applicable UK Directives.



It is not permitted to dispose the product as usual domestic waste. Obey national regulations and use the local recycling system.



The chassis contains components which are sensitive to electrostatic discharge (ESD). The chassis must only be opened and sealed by an authorized service technician. The warranty will not be applicable if the seal is broken.

Note: Other symbols/decals on the product refer to certification requirements for some markets.

2.11 Symbols on the battery



WARNING: Lithium-ion batteries can explode or cause fire if disassembled, short-circuited or handled roughly. Do not expose to water, fire or high temperature.



Read the user instructions.



Do not discard the battery into fire and do not expose the battery to a heat source.



Do not immerse the battery into water.

2.12 Symbols in the Automower® Connect app



Shows the strength of the radio signal that the product receives from the reference station.



The status is EPOS confirmed. The product has an accurate position and direction. This is necessary to operate the product automatically and for the installation of map objects.



The status is EPOS action is necessary. The product has an accurate position but it is necessary to operate the product, manually or automatically, to get an accurate direction.



The status is EPOS searching. The product does not have an accurate position and is searching for the satellite signals and the correction data to get an accurate position.

2.13 General manual instructions

The following system is used in the Operator's Manual to make it easier to use:

- Text written in *italics* is a text that is in the Automower® Connect app, or is a reference to another section in the Operator's manual.
- Text written in **bold** is one of the buttons on the product or in appDrive.

3 Installation

3.1 Introduction - Installation



WARNING: Read and understand the safety chapter before you install the product.



CAUTION: Use original spare parts and installation material.

Note: Refer to www.husqvarna.com for more information about installation.

3.2 Primary components for installation

The installation includes the components that follow:

- Robotic lawn mower that cuts the lawn automatically. It includes a cutting deck and a drive unit.
- Charging station, that charges the product. It includes a power supply, which is connected to an 100-240V power outlet.
- Reference station⁸, that receives satellite signals and sends correction data to the robotic lawn mower.
- Mobile device⁹ with the Automower® Connect app to do the installation and the settings for the product.

3.3 To prepare for installation



CAUTION: Holes with water in the lawn can cause damage to the product.



CAUTION: Read the installation chapter before you start the installation.

- Make a blueprint of the work area and include all obstacles. This makes it easier to examine where to put the charging station, the reference station, and the virtual boundaries.
- Make a mark on the blueprint where to put the charging station, the reference station, the maintenance point, the transport paths and the virtual boundaries for the work areas and stay-out zones.
- Make sure that the work area where the product operates has unimpeded sky view.

⁸ Not included.

⁹ Not included.

- Fill in holes in the lawn to make it level.
 - Cut the grass before you install the product. Make sure that the grass is maximum 10 cm / 4 in.
-


Note: The first weeks after installation the sound level when the product cuts the grass can be higher than usual. The sound level decreases after some time.

3.4 To examine where to put the reference station



Read and understand the instructions about where to put the reference station. Refer to the Operator's manual for the reference station.

3.5 To examine where to put the charging station

- You can put the charging station in the work area or not in the work area. No transport path is necessary if the charging station is put in the work area (A). No transport path is necessary if the product is fully in the work area when it is at the charging station docking point. If the charging station and docking point (B) are not in the work area, you must install a transport path (C).
- Keep a minimum 5 m / 16.4 ft. of free space in front of the charging station.


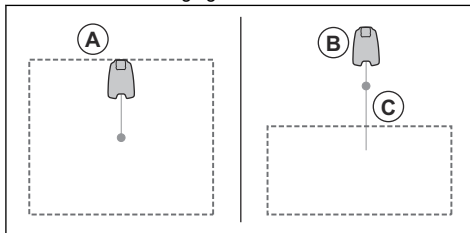


- Put the charging station (A) where the docking point (B) has unimpeded sky view. This means that 110° of the sky in all directions must be unimpeded. The product cannot receive satellite signals that is less than 10% elevation angle. The charging station docking point (B) is where the product stops after reversing from the charging station. The reversing distance can be set to 130-220 cm / 51-87 in.

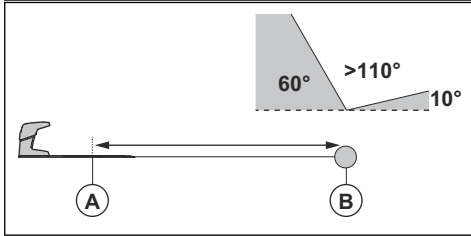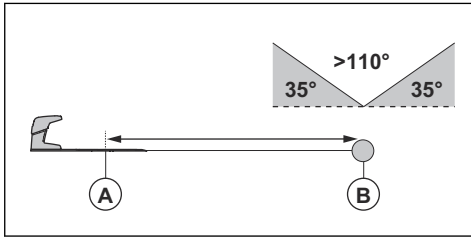


Note: Short reversing distance decreases the risk of track marks. A long reversing distance can be necessary to have good satellite signals at the docking point.

- If the product must not operate in a part of the docking area, put a protective wall that is minimum 15 cm / 6 in. in height. The docking area is a circular area around the charging station with a radius (A) of 3 m / 9.8 ft.

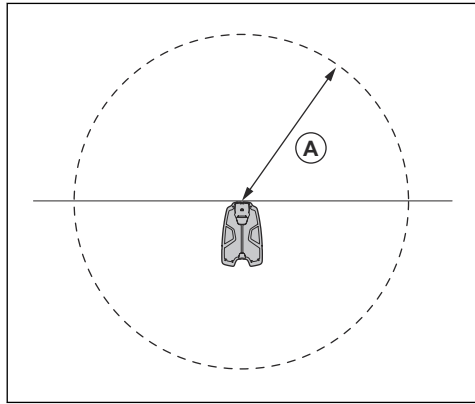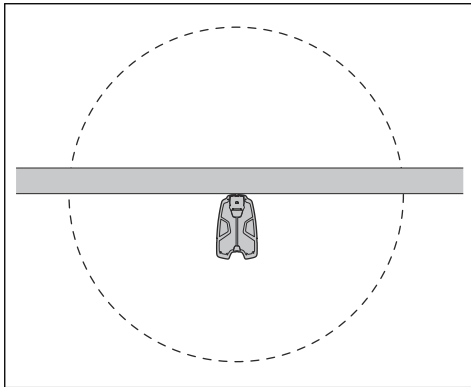


Note: The product uses the charging station signal to find the charging station when it is in the docking area.

- Put the charging station near a power outlet.
- Examine how to install the mains cable safely.
- Put the charging station on a flat surface, not on gravel.
- Husqvarna recommends to install the charging station on a hard surface, such as concrete or equivalent. To install the charging station on a soft surface, use the support plate accessory.
- Put the charging station on a level surface.

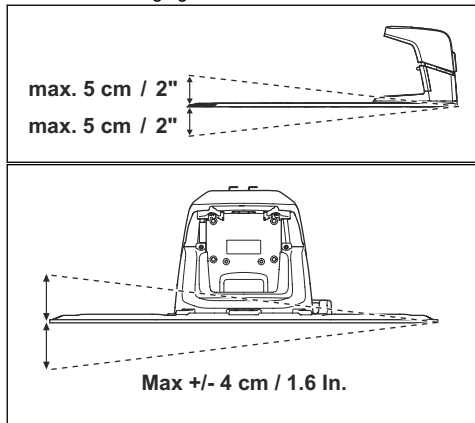

- The baseplate of the charging station must not be bent.

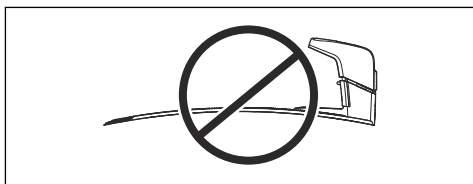

- Put the charging station in an area with good airflow.
- Use a residual-current device (RCD) with a tripping current of maximum 30 mA when you connect the mains cable to the power outlet.



CAUTION: Do not install the charging station where there are metal objects in the ground. Metal objects can cause interference with the charging station signal.

3.6 To examine where to install the objects on the map



CAUTION: If the work area is adjacent to water bodies, slopes, precipices or a public road, the virtual boundary must have a protective wall. The wall must be minimum 15 cm / 6 in. in height.





CAUTION: Do not let the product operate on gravel.



CAUTION: For careful operation without noise, isolate all obstacles such as trees, roots and stones.

Note: Make a blueprint of the work area before you install the virtual boundaries.

- Make sure that the area where the product operates has unimpeded sky view. This means that 110° of the sky in all directions must be unimpeded. The product cannot receive satellite signals that is less than 10% elevation angle.

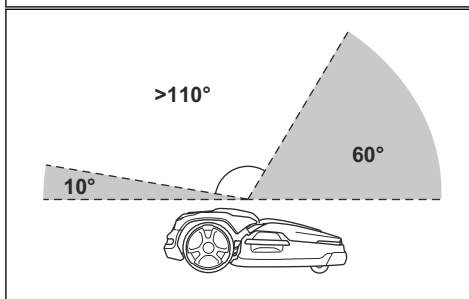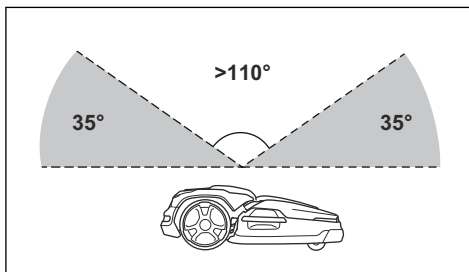


- Make sure that there are no trees near the virtual boundaries and along the paths.
- Make sure that there are no trees with thick vegetation in the areas where the product operates.
- Make sure that the product can receive radio signals from the reference station in all parts of the work area. The maximum distance between the reference station and the product is 500 m / 1640 ft. The maximum distance decreases if there is objects between the reference station and product.

3.6.1 Passages


A passage is a section that has virtual boundary on each side and that connects 2 parts of the work area. The passage must be a minimum of 3 m / 9.8 ft. wide to get a good cutting result. Short passages can be as narrow as 2 m / 6.6 ft. A long narrow passage can have a negative impact of the cutting result. A dead end must be a minimum of 3 m / 9.8 ft. wide.

3.6.2 To install the map objects in a slope


The product can operate in 20% slopes. Do not include too steep slopes in the work area. Too steep slopes can be isolated as stay-out zones. The slope (%) is calculated as height for each m. Example: 10 cm / 100 cm = 10%.



- For slopes more than 20% in the work area, isolate the slope with a stay-out zone.
- For pits in the lawn, make sure that the minimum radius (A) of the pit is 1.5 m / 15 ft.

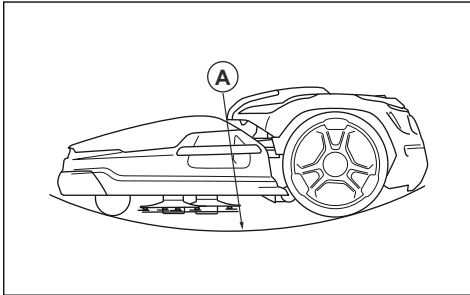

- For hills in the lawn, make sure that the minimum radius (B) of the hill is 15 m / 50 ft., when the product is set at the lowest cutting height.

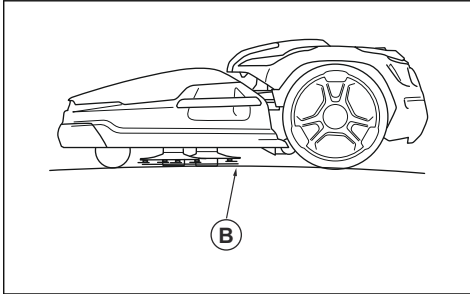

- For slopes adjacent to a public road, put a fence or a protective wall of minimum 15 cm / 6 in. along the outer edge of the slope.

3.7 Installation of the product

3.7.1 To install the product

Do the general steps that follow to install the product:


1. Attach the cutting deck to the drive unit. Refer to *To attach the cutting deck on page 16*.
2. Install the charging station. Refer to *Installation of the charging station on page 17*.
3. Install the reference station. Refer to the Operator's manual for the reference station.
4. Install the Automower® Connect app on your mobile device. Refer to *Automower® Connect on page 18*.
5. Do a pairing operation of the product and the Automower® Connect app. Do the basic settings in the start up sequence in the Automower® Connect app. Refer to *To install the Automower® Connect app on page 19*.
6. Make a map with work areas, stay-out zones, transport paths and maintenance points. Refer to *Installation of the map objects on page 19*.
7. Use Automower® Connect app to do settings for the product. Refer to *Settings on page 23*.

3.7.2 Installation tools


- 19 mm open end socket wrench.
- Hex key, 8 mm. Included with the charging station.
- Combi tool. Included with the cutting deck.
- 10 mm socket wrench.
- Drilling machine, 6 mm drill.
- Ratchet wrench or torque wrench, 10mm.

3.7.3 To attach the cutting deck


1. Set the drive unit to OFF. Refer to *To set the product to OFF on page 27*.
2. Put the cutting deck in front of the drive unit.
3. Open the hatch on the drive unit.

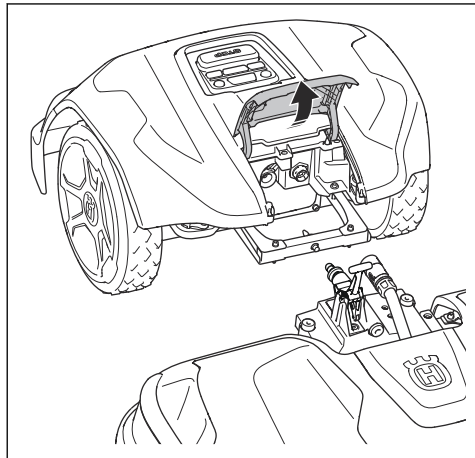


4. Remove the center top cover on the cutting deck.
5. Put the frame on the drive unit above the cutting deck and the cable.
6. Align the shaft with the hole in the drive unit.

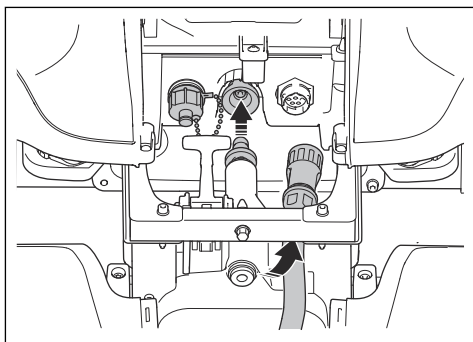


7. Align the shaft with the hole in the frame.

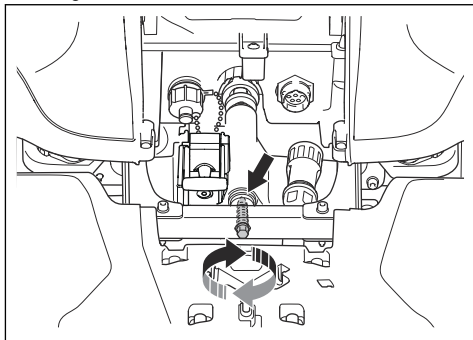

8. Install the screw with the ratchet wrench or torque wrench, 10mm. Tightening torque 5 Nm.
9. Tighten the nut on the other side with a 19 mm open end socket wrench. Tightening torque 10-15 Nm.
10. Connect the cable to the drive unit.
11. Tighten the inner part of the connector clockwise.

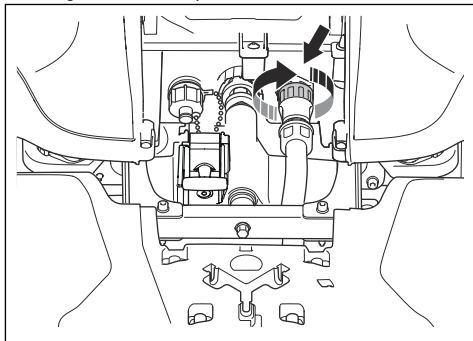

12. Lift the rear part of the cutting deck and tilt the lever.

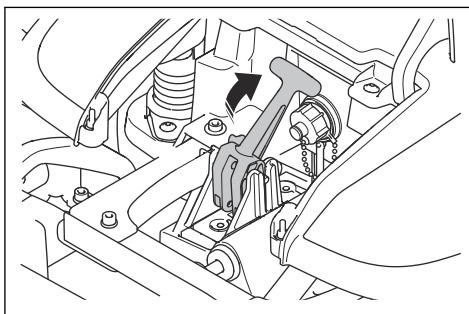

13. Install the center top cover on the cutting deck.
14. Close the hatch.

3.7.4 To remove the cutting deck

1. Set the drive unit to OFF. Refer to *To set the product to OFF* on page 27.
2. Open the hatch on the drive unit.
3. Remove the center top cover on the cutting deck.
4. Loosen the inner part of the connector counterclockwise and disconnect the cable.
5. Tilt the lever.
6. Loosen the nut with the 19 mm open end socket wrench and remove the screw with the Combi tool.
7. Remove the cutting deck from the drive unit. Put the covers on the 2 connectors.

3.7.5 Installation of the charging station

Read and understand the instructions about the charging station. Refer to *To examine where to put the charging station* on page 13.



WARNING: Read and understand the safety instructions for installation. Refer to *Safety instructions for installation* on page 4.




CAUTION: Do not make new holes in the charging station plate.




CAUTION: Do not put your feet on the baseplate of the charging station.

3.7.5.1 To install the charging station


1. Put the charging station in the selected area.
2. Put the 2 support plates on the rear side of the top baseplate. Use an 8 mm hex key to attach the support plates from the front side with 2 couplings.

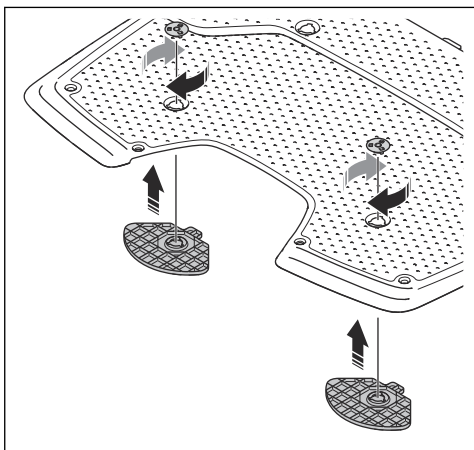


- Put the 2 top baseplates on top of the lower baseplate.

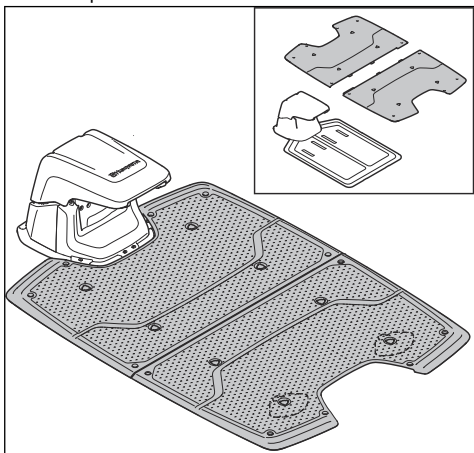

- Attach the top baseplates to the lower baseplate with 6 couplings. Use a 8 mm hex key to attach the couplings.

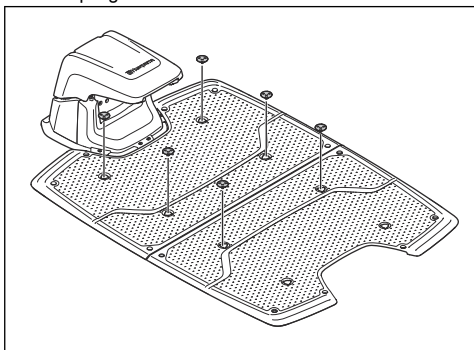

- Drill 14 holes in the ground with a 6 mm drill.
- Attach the charging station to the ground with the 14 supplied screws. Use a 10 mm socket wrench to attach the screws.

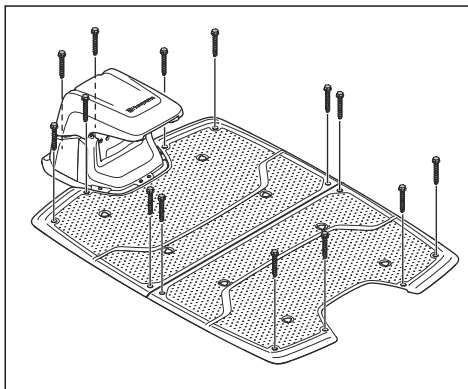


CAUTION: Do not tighten the screws too much.

- Connect the mains cable to a 100-240V power outlet.
- Put the product in the charging station. Push the **ON/OFF** button on the product for 3 seconds to charge the product. Refer to *To charge the battery on page 27*.

3.7.5.2 To do a visual check of the charging station

- Make sure that the LED indicator lamps on the charging station have a green light.

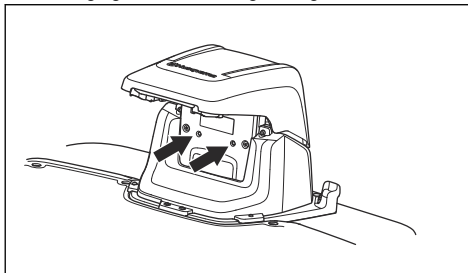

- If the LED indicator lamps do not have a green light, do a check of the installation. Refer to *LED indicator lamps on the charging station on page 42* and *To install the charging station on page 17*.

3.7.6 Installation of the reference station

Install the reference station according to the instructions in the Operator's manual for the reference station.

3.7.7 Automower® Connect

Automower® Connect is a free app for your mobile device. Use the app for installation, settings and

operation of your product. You can also find more information for example about alarm and statistics in the Automower® Connect app.

The app gives 2 modes of connectivity: Long-range cellular connectivity and Short-range Bluetooth® connectivity.

- The dashboard shows the current operation of the product and the battery state of charge.
- The *Account* menu shows an overview of your Husqvarna account settings and lets you set the unit format.
- The *My mowers* menu lets you manage all the products that are connected to your Husqvarna account and add new ones.

Note: All countries do not support cellular connection to Automower® Connect because of regional specified cellular systems. The included Automower® Connect lifetime service only applies if there is a third part sub-supplier of 2G/4G available in the operational area.

3.7.7.1 To install the Automower® Connect app

1. Download the Automower® Connect app on your mobile device.
2. Sign up for a Husqvarna account in the Automower® Connect app.
3. An e-mail is sent to the registered e-mail address. Follow the instructions in the e-mail in less than 24 hours to validate your account.
4. Log in to your Husqvarna account in the Automower® Connect app.

3.7.7.2 Automower® Direct

You can use Automower® Direct if you have the Automower® Connect app and the PIN code for the product but no Husqvarna account.

Automower® Direct uses short-range Bluetooth® connectivity. It can be used if the cellular connectivity is not supported or for a temporary connection to the product.

3.7.8 Husqvarna Fleet Services™

Husqvarna Fleet Services™ is a cloud solution that gives the commercial fleet manager an overview of all products. It also gives the fleet manager the possibility to control all products remotely. Husqvarna Fleet Services™ is available as a web service and as an app. When you use the Husqvarna Fleet Services™ app you will be redirected to the Automower® Connect app. For more information about Husqvarna Fleet Services™, refer to www.husqvarna.com.

3.7.8.1 To connect to the product with Husqvarna Fleet Services™

1. Download the Husqvarna Fleet Services™ app and Automower® Connect app to your mobile device.

2. Log on to the Husqvarna Fleet Services™ app.
3. Follow the instructions about how to pair the product with Husqvarna Fleet Services™.

3.7.9 To do the basic settings

When the product is set to ON for the first time, there are some basic settings to do before the product can start to operate.

1. Set the product to ON.

Note: The Bluetooth® pairing operation mode of the product is enabled for 3 minutes. If the pairing operation between the product and the mobile device is not completed correctly, push the Bluetooth® button on the product to enable Bluetooth® again.

2. Log on to your Husqvarna account in the Automower® Connect app.
3. Start Bluetooth® on your mobile device.
4. Select *My mowers* in the Automower® Connect app, and add your product.
5. Enter the factory PIN code.

Note: Keep your PIN code safe.

6. Do a pairing operation of the product and the reference station.
7. Do a pairing operation of the product and the charging station. Select to enable GeoFence or not and set the reversing distance.


Note: It is only necessary to do a pairing operation of the Automower® Connect app and the product one time.

3.7.10 Installation of the map objects

Read and understand the instructions about where to install the map objects. Refer to *To examine where to install the objects on the map on page 15*.

On the map you can install the objects that follow in the Automower® Connect app:

- *Work areas* (A)
- *Stay-out zones* (B)
- *Transport path* (C)
- *Charging station* (D)
- *Maintenance point* (E)
- *Reference station* (F)
- *Work area, Secondary area* (G)

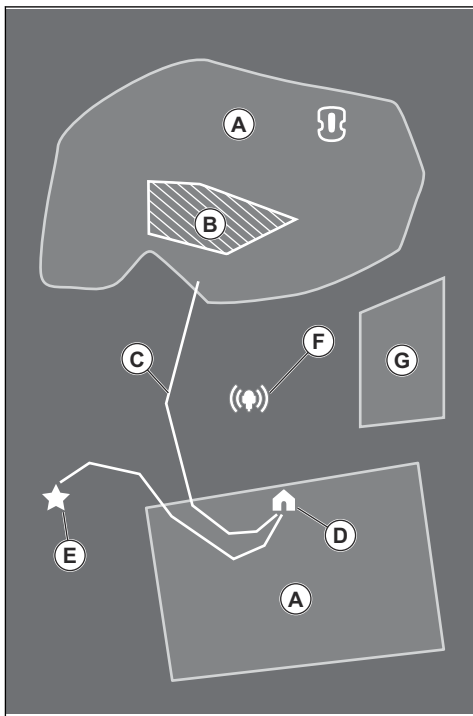

For a complete map installation, you must install a work area and a charging station on the map.

A work area is specified by virtual boundaries. Maximum 20 work areas and secondary areas can be installed on a map.

There are two types of work areas:

- A work area that has a charging station in it or connected to it with a transport path where the product operates automatically.
- A secondary area is a work area with no charging station and no transport path. The product must be moved manually to and from the work area.

A transport path is a specified path between the docking point in front of the charging station and a work area. The product can operate automatically in this path, but does not cut grass. A transport path can temporarily be enabled and disabled in the app.


Stay-out zones can be made if there are areas where the product must not operate. A stay-out zone is specified by virtual boundaries. Stay-out zones can temporarily be enabled and disabled in the app.

A maintenance point is a specified position where the product can be parked at. This can for example be used for a service point where maintenance of the product is done. The maintenance point is connected to the docking point with a path.

To install objects on the map, operate the product with the appDrive installation to add waypoints on the map. Refer to *To install objects on the map on page 20*.


3.7.10.1 To install objects on the map

The waypoints (A) are positions that makes the virtual boundaries and paths (B). The lines are straight between the waypoints. Add a number of waypoints to make smooth curves. You can adjust the positions of the waypoints in the app after the installation of the map.

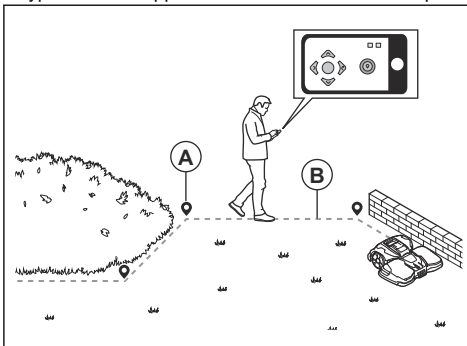


CAUTION: Do not lift and move the product between the waypoints when you install the map objects. Use appDrive for a correct installation.


Note: The position of the waypoint when you install a work area or a stay-out zone is in the front left corner of the product.

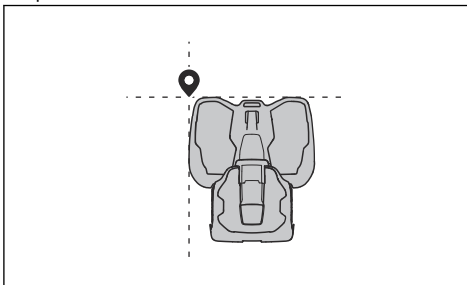

Note: The position of the waypoint when you install a transport path or a path to a maintenance point is in the middle of the product between the drive wheels.

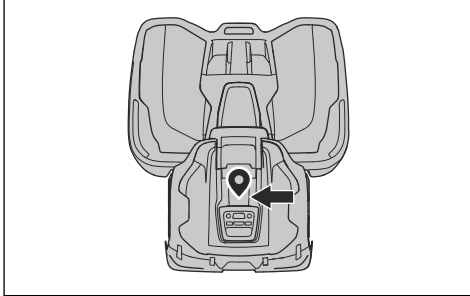

- Make sure that you are near the product and connected to the product with the app with Bluetooth®.
- Make sure that the status is *EPOS confirmed* in the appDrive.
- Select the object you want to install and use the buttons in the appDrive installation to operate the product.
- Use the **up** button (A) to move the product forward.
- Use the **down** button (B) to move the product rearward.
- Use the left **arrow** button (C) to rotate the product to the left.
- Use the right **arrow** button (D) to rotate the product to the right.
- Use the **center** button (E) as a joystick to move and rotate the product in any direction.
- Use the **waypoint** button (F) to add a waypoint in the map.

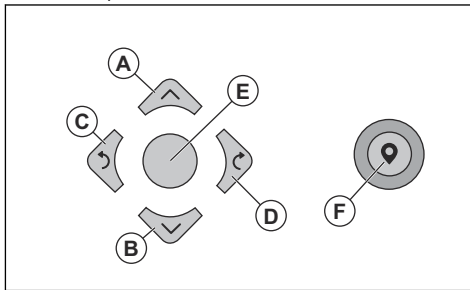


Note: Walk 2-3 m / 6.5-9.8 ft. behind the product when you operate the product with appDrive.


To make a work area

Minimum 3 waypoints are necessary to make a work area.


- Operate the product clockwise around the boundary of the work area.
- Add waypoints on the map. Add the waypoints minimum 3 cm / 1 in. from obstacles.

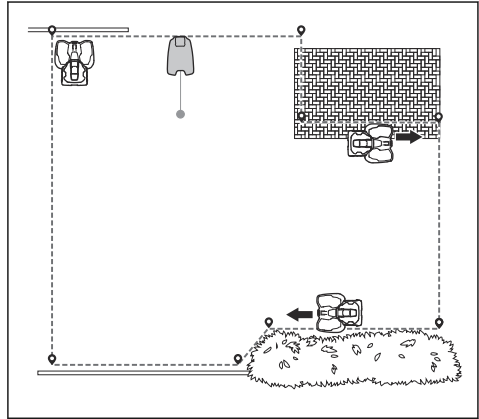


- Add a waypoint to make the product cut the grass at the edge between the lawn and the stone path. Make sure that you straddle the edge of the lawn and the stone path when you add a waypoint. The product can straddle the edge if the height of the stone path is maximum 1 cm / 0.4 in. in relation to the lawn.

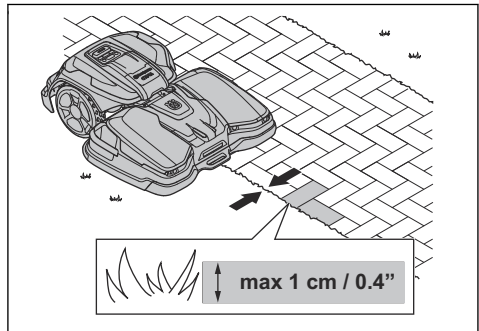

- Add the waypoint at the outer corner to install the virtual boundary around a corner.

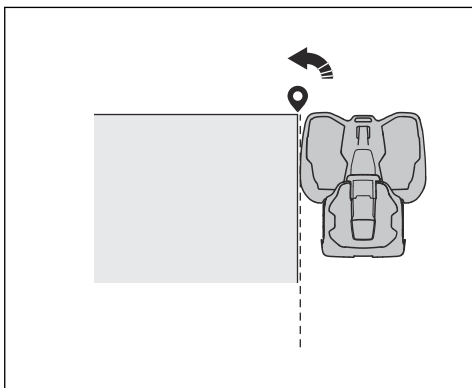


- Do not set waypoints that make a virtual boundary go across itself in the same work area.
- Save the work area to automatically connect the first and last waypoint with a virtual boundary.

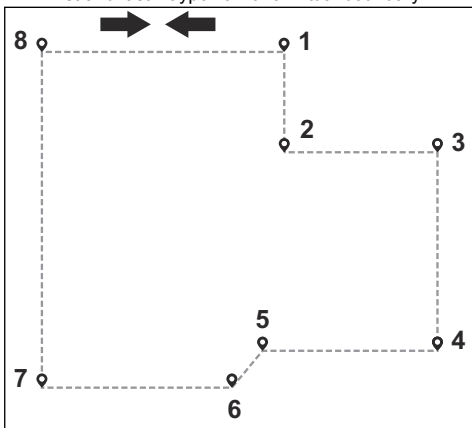

To make a stay-out zone


Minimum 3 waypoints are necessary to make a stay-out zone.

- Operate the product counterclockwise around the boundary of the stay-out zone.
- Add waypoints on the map. Add the waypoints minimum 3 cm / 1 in. from obstacles.
- Do not set waypoints that make a virtual boundary go across itself in the same stay-out zone.
- Save the work area to automatically connect the first and last waypoint with a virtual boundary.

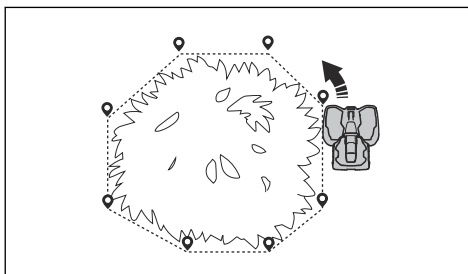


To make a transport path

- Operate the product and add waypoints on the map to install a transport path. Start in a work area minimum 1 m / 3.3 ft. from the virtual boundary.
- Do not install a transport path across a stay-out zone.
- Do not set waypoints that make the transport path go across the same transport path.
- Operate the product and add waypoints to connect the transport path to the docking point.
- Save the transport path to automatically connect the last waypoint to the docking point.
- Set the corridor width (A) for the transport path. The corridor width can be set to 3-5 m / 9.8-16.4 ft.

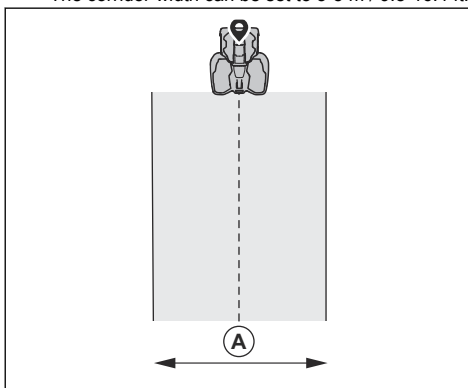

To make a maintenance point

- Operate the product and add waypoints on the map. Start to add waypoints at the position where you install the maintenance point. The first waypoint specifies the maintenance point.
- Operate the product and add waypoints to make a path to the charging station.
- Save the maintenance point to automatically connect the last waypoint to the docking point.
- Set the corridor width (A) for the maintenance point. The corridor width can be set to 3-5 m / 9.8-16.4 ft.

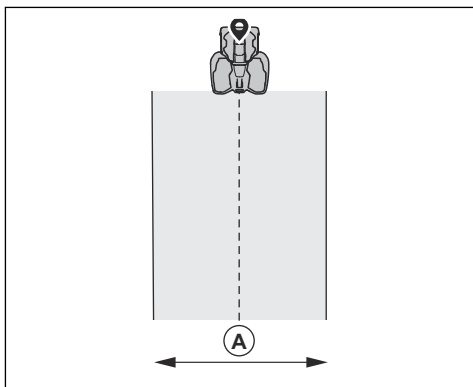

3.8 Settings

The product has factory settings but the settings can be adapted to each work area.

3.8.1 Schedule



In *Schedule* menu you can change the schedule settings for the product. You can set separate schedule settings for each work area. *Secondary areas* cannot be scheduled.

The schedule function controls which hours the product is permitted to operate. When the product does not operate, it is parked in the charging station. You can see which hours and days the product operates in the schedule overview in the app.

The table shows the approximate number of hours the product must operate each day for a specified area dimension.

Area	CEORA™ 544 EPOS	CEORA™ 546 EPOS
5 000 m ² / 1.25 acre	6 h	5 h
10 000 m ² / 2.5 acre	12 h	10 h
15 000 m ² / 3.75 acre	18 h	14 h
20 000 m ² / 5 acre	24 h	19 h
25 000 m ² / 6.25 acre	-	24 h

There are 3 different quality levels that you can select which decides the cutting frequency:

- Pro sport quality: Used for premium sports fields or golf courses that are cut everyday at low cutting height. For a well-managed, lush, and dense turf.
- Pro quality: Used for sports fields and golf courses at medium ambition level. Also used for facilities with high demands on grass quality with medium grass height and normal dense quality of turf.
- Regular quality: Used for green spaces with lower demands. This means areas with less grass growth, high cutting height and normal to low dense quality of turf.

Quality	Operation frequency
Pro sport quality	Each day
Pro quality	Each second day
Regular quality	Each third day

3.8.2 Cutting height



The cutting height is set individually for each work area. The cutting height can be set to 20-70 mm / 0.8-2.8 in.

3.8.3 Pattern



The settings for the systematic cutting is set for each work area. You can do these settings:

- Set the pattern for how the product operates.
- Set the direction of the pattern.
- Enable or disable the *Border mowing* where the product cuts around the work area 2-3 times along the virtual boundary.
- Set the type of the *Border mowing*. With *Fixed border mowing* the product always operates in the same paths to keep a sharp border around the work area. With *Variable border mowing*, the product operates in different paths to decrease the risk of track marks along the virtual boundary.

3.8.4 Operation



In the *Operation* menu you can change the settings of the *Object avoidance* and *ECO mode*.

3.8.4.1 Object avoidance

The *Object avoidance* function makes the product decrease speed when it comes near an obstacle to avoid to collide with it.

Note: This can cause that the grass is not cut around the obstacle. This function can cause the product to not cut high grass satisfactorily.

3.8.4.2 ECO mode

If *ECO mode* is enabled, it switches off the signal in the charging station, when the product is parked or is charging.

Note: Use *ECO mode* to save energy and prevent interference with other equipment, for example hearing loops or garage doors.

Note: To start the product manually in the work area, push the **STOP** button before you remove the product from the charging station. If not, the product cannot park at the charging station.

3.8.5 Accessories



3.8.5.1 Headlights

There are 4 different headlight settings that control when the headlights are on:

- *Always on*
- *Evening only (19:00-00:00)*
- *Evening and night (19:00-07:00)*
- *Always off*

The headlight can be set to flash or to have a constant light. The headlights can also be set to flash if there is an error.

Note: Husqvarna recommends to use the headlights at night time.

3.8.5.2 Avoid collisions with the Automower® house

The wear on the baseplate of the charging station decreases when you use *Avoid house collisions*. Use *Avoid house collisions* if the cutting height of the product is set to 30 mm or less. If you select *Avoid house collisions* it can result in grass that is not cut around the charging station.

3.8.6 General (Bluetooth® only)



This function is used to set time and date, or to reset to default settings.

3.8.6.1 Time & date

The time and date can be changed manually, or by using the time and date from the mobile device.

3.8.6.2 Reset to factory settings

The user settings can be reset to factory settings. All map objects and the schedules will be deleted.

Note: *PIN code, Loop signal, Messages and Date & Time* will not be reset.

3.8.7 Security (Bluetooth® only)



The security settings controls the PIN code, the GeoFence and other security functions. The correct PIN-code must be entered to get access to the *Security* menu in the Automower® Connect app.

3.8.7.1 New loop signal

The loop signal is randomly selected to create a unique link between the product and the charging station. In rare cases, there may be a need to generate a new signal, for instance if 2 adjacent installations have a very similar signal.

3.8.7.2 Change PIN code

You can change the PIN code in the Automower® Connect app. Make a note of the new PIN code in Memo. Refer to *Introduction on page 6*.

3.8.7.3 Theft protection

In the *Theft protection* menu it is possible to set the alarm duration and also what events should trigger the alarm. The factory setting is to require PIN code and the alarm duration is 1 min.

Alarm duration

There is a possibility to set how long the alarm signal should last. A setting between 1 and 10 minutes is possible.

STOP button pressed

If the alarm "*STOP button pressed*" is enabled, the alarm goes off if someone presses the **STOP** button and the PIN code is not entered within 30 seconds.

Carried away

If the alarm *Carried away* is enabled, the product senses unexpected motions, and the alarm goes off.

3.8.7.4 GeoFence

GeoFence is a GPS-based theft protection that makes a virtual fence for the product. If the product is more than a set distance away from the center position the product will be deactivated and an alarm will start. The center position will be set to the current position of the product when the function is enabled. The PIN code is needed to deactivate the alarm and to start the product again. The GeoFence is only enabled when the product is switched on.

3.8.8 Automower® Connect (Bluetooth® only)



In *Automower® Connect* you can enable or disable the Automower® Connect module. You can also see the signal strength, connectivity status, initiate new pairing or remove the product from the paired accounts.

3.8.9 Messages

In this menu the previous fault and information messages can be found. For some of the messages, there are tips and advice to help to rectify the fault.

If the product is disrupted in any way, for example it is trapped or the battery is low, a message is saved relating to the disruption and the time it happened.

If the same message is repeated several times, this may indicate that an adjustment to the installation or the product is required. Refer to *Installation on page 13*.

3.8.10 Mowing profiles

You can save different sets of settings in the *Mowing profiles*. Use this function when you use one product for more than one location or to have different settings on the same location. In the *Mowing profiles* the product settings, map objects and their settings are saved.

3.8.11 Download firmware over the air (Firmware over the air FOTA)

The product has a function that automatically downloads new firmware. When a new firmware is available, a notification shows in the app where you can select to install the new firmware. In the factory setting this function is enabled.


4 Operation

4.1 To set the product to ON



WARNING: Read and understand the safety chapter before you use the product.

- Push the **ON/OFF** button for 3 seconds to set the product to ON. Make sure that the LED indicator comes on.

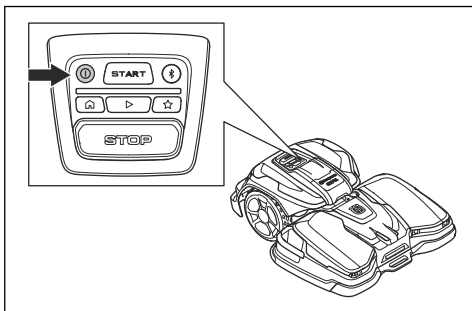

4.2 To start the product

1. Push the **ON/OFF** button for 3 seconds to set the product to ON.
2. Open the Automower® Connect app.
3. Enter the PIN code.
4. Push the **START** button on the product.

4.3 To select operation mode

4.3.1 Scheduled operation

The product operates to the set schedule in the work area where it cuts the grass and charges automatically.

4.3.1.1 To select scheduled operation in the app

1. Open the app on your mobile device.
2. Select *Start > Resume Schedule*.

4.3.1.2 To select scheduled operation in the control panel

1. Push the **STOP** button.
2. Push the **Play** button.
3. Push the **START** button.

4.4 appDrive

Use the appDrive to operate the product manually.

4.4.1 To use appDrive


1. Open the app on your mobile device.

2. Select *Start > appDrive*.

4.4.2 To operate the product with appDrive

Use the buttons to operate the product:

- Use the **up** button (A) to move the product forward.
- Use the **down** button (B) to move the product rearward.
- Use the left **arrow** button (C) to rotate the product to the left.
- Use the right **arrow** button (D) to rotate the product to the right.
- Use the **center** button (E) as a joystick to move and rotate the product in any direction.

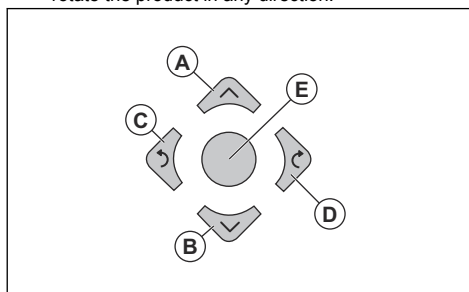

Note: Walk 2-3 m / 6.5-9.8 ft. behind the product when you operate the product with appDrive.

4.5 Work area selection

This function lets the product temporarily operate in a selected work area. When the selected work area is cut, the product continues to operate to the set schedule.

For the product to operate in a secondary area, you must move the product manually to and from the secondary area. The product operates until the work area is cut or until the battery is empty.

4.5.1 To select the work area in the app

1. Open the app on your mobile device.
2. Select *Start*.
3. Select the work area.

4.6 Operation mode Pause

The operation mode *Pause* means that the product stops at its current position and stops the operation. The product stays in operation mode *Pause* until you select *Park* or *Start* in the Automower® Connect app.

4.6.1 To select operation mode Pause in the app

1. Open the app on your mobile device.
2. Select *Pause*.

4.7 Operation mode Park

The operation mode *Park* means that the product goes back to the charging station. The product stays in the charging station for a selected period of time or until you select a new operation mode.

4.7.1 To select operation mode Park in the app

1. Open the app on your mobile device.
2. Select *Park*.
3. Select for how long the product must stay in the charging station.

4.7.2 To select operation mode Park on the control panel

1. Push the **STOP** button.
2. Push the **Park** button.
3. Push the **START** button.

The product stays in the charging station for 3 hours and then it continues to operate to the set schedule.

4.8 Operation mode Park at Maintenance point

You can park the product at the maintenance point to do maintenance on the product.

4.8.1 To park the product at the maintenance point with the app

1. Open the app on your mobile device.
2. Select *Park > Maintenance point*.

The product is parked at the maintenance point until you select a new operation mode.

4.8.2 To park the product at the maintenance point with the control panel


1. Push the **STOP** button.
2. Push the **Maintenance point** button.
3. Push the **START** button.

The product is parked at the maintenance point until you select a new operation mode.

4.9 To stop the product

1. Push the **STOP** button on top of the product.

The product stops and the cutting motor stops.

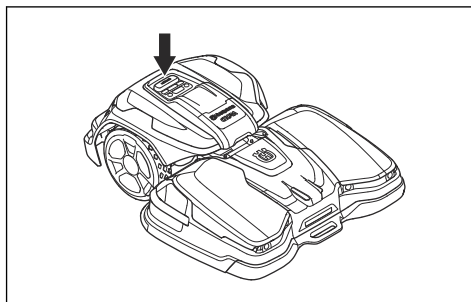

Note: When you push the **Play** and **START** button again, the product continues to operate in the same operating mode as before.

4.10 To set the product to OFF

1. Push the **STOP** button on top of the product.
2. Connect the product with Bluetooth® short-range in the app.

Note: The product cannot be set to OFF if it is not connected to the app with Bluetooth®.

3. Push the **ON/OFF** button for 3 seconds to set the product to OFF. Make sure that the LED indicator goes out.

4.11 To charge the battery



WARNING: Read and understand the safety instructions for the battery before you use the product. Refer to *Battery safety on page 4*.

When the product is new or after long-term storage, the battery can be empty. Charge the battery before you start the product.

1. Push the **ON/OFF** button for 3 seconds to set the product to ON.
2. Put the product into the charging station until the charging plates touch the contact plates. Refer to charging plates and contact plates in *Product overview charging station, CEORA™ CS4 on page 9*.
3. Make sure that the charging is in progress in the Automower® Connect app or that the LED indicator pulsates blue.

Note: If the charging does not start automatically, disconnect and connect the mains cable to the charging station to restart it. The charging starts automatically when you restart it.

4.12 To release the wheel brakes and move the product

You can release the wheel brakes and push the product forward to move it manually as an alternative of to lift it.

1. Push and hold the **STOP** button. The wheel brakes are released after 3 seconds.

Note: The wheel brakes enables again when you release the **STOP** button.

2. Keep the **STOP** button pushed and push the product forward to move it.

5 Maintenance

5.1 Introduction - maintenance



WARNING: Set the product to OFF before you do maintenance on the product.



WARNING: Use protective gloves.

For better operation and lifetime of the product, make sure to clean the product regularly and replace worn parts. Obey the instructions in *Warranty on page 52*.

When the product is new, examine the blade discs and blades each week. If the wear is low, you can increase the interval for the next time you examine the blade discs and blades. If there is much wear, you can decrease the interval.

It is important that the blade disc rotates easily and that the edges of the blades are not damaged. The usual lifetime of the blades are 1 to 4 weeks. The conditions that follow can increase or decrease the lifetime of the blades:

- Operation time and dimension of the work area.
- Length and thickness of the grass.
- Soil, sand and use of fertilizers.
- Objects such as cones, tools, stones and roots in the work area.

Note: The cut result can be unsatisfactory if the blades are blunt. Refer to *Replacement of the blades and blade discs on page 32* on how to replace the blades.

5.2 Maintenance schedule

The maintenance schedule shows how to do servicing and maintenance on the product. Follow the maintenance schedule for a better operation and to increase the lifetime of the product.

X = The instructions are given in this operator's manual.

O = The instructions are not given in this operator's manual. Speak to your approved servicing dealer.

To prepare	Weekly	Every year	Every third year
Clean the product. Refer to <i>Clean the product on page 32</i> .	X		
Examine the product for damage and wear.	X		
Do a update of the firmware for the drive unit and cutting deck. Refer to <i>Download firmware over the air (Firmware over the air FOTA) on page 25</i> .		X	
Do a update of the firmware for the charging station.		O	
Do a check of the servicing messages for recommended upgrades.		O	


Servicing	Weekly	Every year	Every third year
Drive unit			
Remove the wheel covers and clean the wheels. Refer to <i>To clean the drive unit on page 32.</i>		X	
Examine if the cap for the USB outlet is attached correctly.		X	
Charge the battery fully before you put the product into storage. Refer to <i>To charge the battery on page 27.</i>		X	
Examine the wheel brushes ¹⁰ . Adjust the position of the wheel brushes if necessary or replace them if they are worn. Refer to <i>Adjustment of the wheel brushes on page 33.</i>		X	
Examine the rubber grommets on the chassis to make sure that it is sealed correctly.		O	
Examine and clean the collision columns.		O	
Do a check of the tightening torque of chassis screws. Examine the thread inserts.		O	
Open the motor lid and do a check if there is leakage.		O	
Examine and clean the airflow filter.		O	
Replace the airflow filter.			O
Open the chassis and replace the sealing strip.			O
Open the motor lid and replace the gasket.			O
Cutting deck			
Examine the blades and replace the blades and blade screws if it is necessary. Refer to <i>Replacement of the blades and blade discs on page 32.</i>	X		
Examine and polish the charging plates.		X	
Examine bellows for cutting discs and for the front wheels.		X	
Examine the ultrasonic sensors and tighten the screws.		O	
Examine the rubber grommets in the electronic boxes.		O	
Examine and clean the collision columns.		O	
Remove the protection plate and clean the inner side.		O	
Examine the skid plate and skid plate bearing.		O	
Lubricate the cutting height adjustment motors.		O	
Examine the wheels for wear.		O	
Examine the bearings in the front wheels and wheel holders.		O	
Lubricate the interface between the drive unit and the cutting deck and examine them for wear.		O	
Calibrate the cutting height.		O	

¹⁰ Not included. Is available as accessory.


Servicing	Weekly	Every year	Every third year
Examine and clean the airflow filter.		○	
Replace the airflow filter.			○
Examine the charging cable and connector.			○
Charging station			
Examine and polish the contact plates on the charging station.	X		
Examine the mains cable, power supply unit, charging cable and connectors.		○	
Open the charging station and replace the gasket.		○	
Last step	Weekly	Every year	Every third year
Use a software service tool to do a function test of the functions of the product.		○	

5.3 To put the cutting deck in service position


1. Set the product to OFF. Refer to *To set the product to OFF on page 27.*
2. Open the hatch on the drive unit.

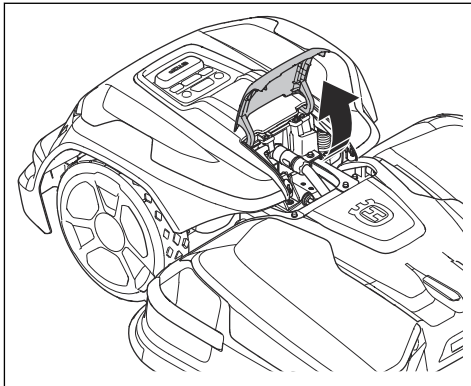

3. Tilt the lever.

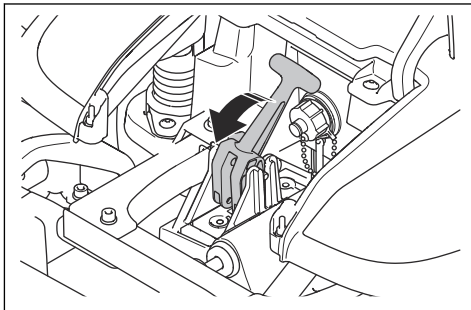


4. Push down the lever and lift up the front of the cutting deck by the handle. Make sure that the cutting deck is in a vertical position.

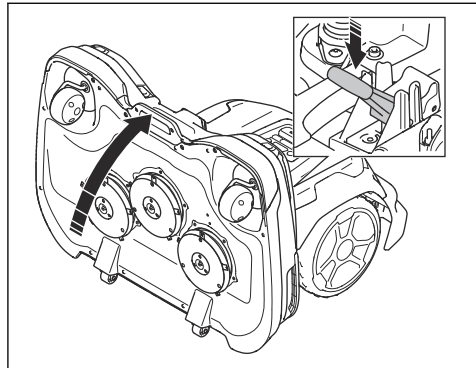

5.4 To put the cutting deck in cut position

1. Use the front handle on the cutting deck to fold down the cutting deck.

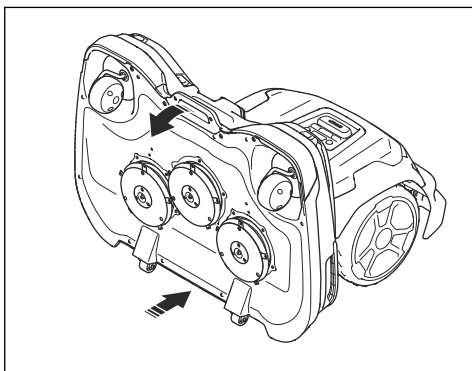

2. Lift the rear part of the cutting deck and tilt the lever.
3. Close the hatch.

5.5 Clean the product

Husqvarna recommends to use a special cleaning and maintenance kit, available as an accessory. Speak to your Husqvarna representative for more information.




CAUTION: Do not use a high-pressure washer to clean the product and the charging station. Do not use solvents for cleaning.

5.5.1 To clean the drive unit

The product does not operate satisfactorily in slopes if the wheels are blocked with grass.

1. Loosen the clips with the flat screwdriver on the Combi tool and remove the rear bumper.

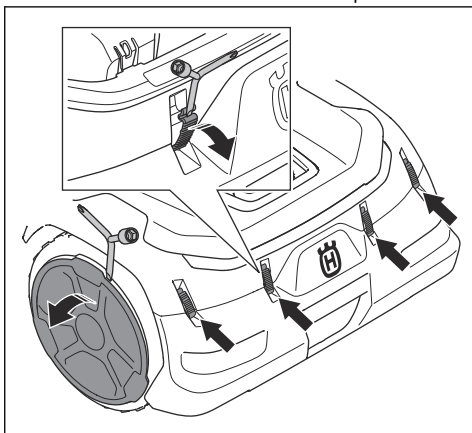

2. Remove the wheel cover with the flat screwdriver on the Combi tool.

3. Clean the body of the product, wheels and chassis with a brush, compressed air or running water.

5.5.2 To clean the cutting deck and blade discs

Examine the blade discs and blades weekly.

1. Put the product in service position. Refer to *To put the cutting deck in service position on page 31.*
2. Clean the blade discs, protection plate and the wheels with a brush, compressed air and running water.
3. Make sure that the blades are not damaged and that the blades and blade discs can rotate freely.

5.5.3 To clean the charging station



WARNING: Disconnect the mains cable from the power outlet before maintenance, or when you clean the charging station.


Note: The product cannot go into the charging station if there are objects in the charging station.

- Clean the charging station regularly from grass, twigs and other objects.

5.6 Replacement of the blades and blade discs



WARNING: Husqvarna can only guarantee safety with the specified Husqvarna original blades. Refer to *Technical data on page 48.*

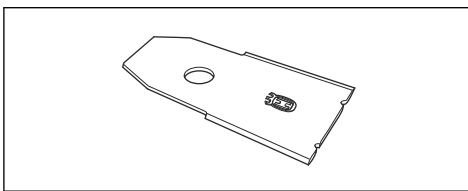


WARNING: You must replace the screws when you replace the blades. The used screws can wear quickly and make the blade come loose, this can cause serious injury.

Replace worn or damaged blades for a safe operation. Replace the blades regularly for a satisfactory cut result and a low energy use. All 5 blades and screws must be replaced at the same time to get a balanced cutting system. After half the lifetime of the blades, the left


and right cutting disc must switch positions to wear the blades equally. The blades can be replaced when the blade discs are installed on the product. You can also remove the blade discs and then replace the blades.

5.6.1 To replace the blade discs

1. Push the **STOP** button.
2. Set the product to OFF.
3. Put the cutting deck in service position. Refer to *To put the cutting deck in service position on page 31*.
4. Remove the coupling on the blade disc with the Combi tool.

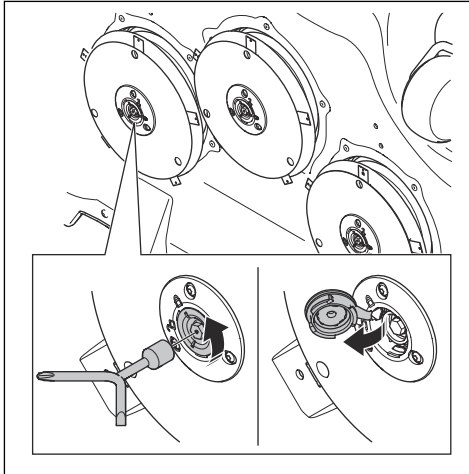


5. Loosen the screw with the Combi tool.

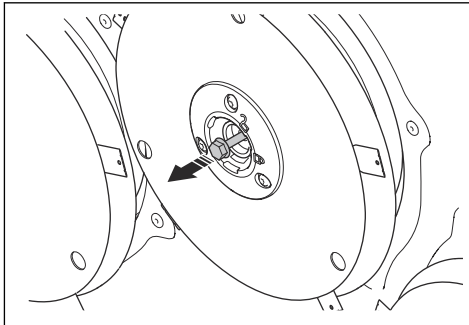

6. Remove the blade disc.
7. Clean the shaft and hub if it is dirty.
8. Install the blade disc in opposite sequence.

5.6.2 To replace the blades on the blade disc

1. Remove the 5 screws.

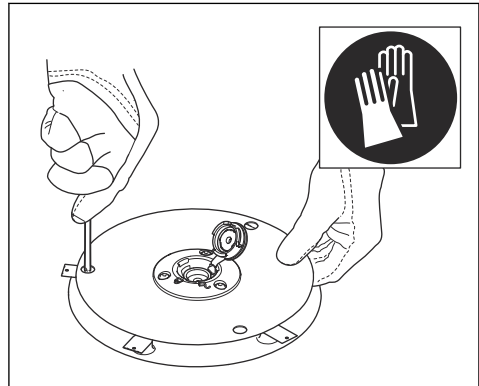


2. Remove the 5 blades.
3. Attach 5 new blades and screws.
4. Make sure that the blades can pivot freely.

5.7 Adjustment of the wheel brushes

The wheel brushes must be adjusted if they are worn. Wheel brushes are available as accessory.

5.7.1 To adjust the wheel brushes

- Loosen the screw with a T27 screwdriver to adjust the wheel brushes. Make sure that the brushes touches the bottom of the wheel threads.

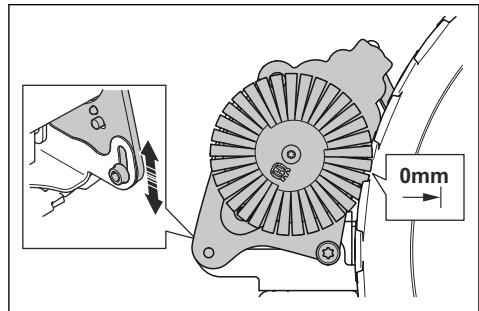

5.8 Battery



CAUTION: Charge the battery fully before you put the product into storage. If the battery is not fully charged it can cause damage to the battery.

If the operating time of the product is shorter than usual between charges, this means that the battery is at the end of its life cycle. Replace the battery to extend the operating time.

Note: The battery life is related to the length of the season and how many hours a day the product operates. A long season or many hours of operation a day means that the battery must be replaced more regularly.

5.9 Winter service

Speak to your Husqvarna central service to make winter service before storage of the product. Do winter service of the product yearly to keep the product in good condition.

The winter service usually includes the procedures that follow:

- Clean the cutting deck and drive unit.
- Do a function test and component test of the product.
- Examine wear items such as blades and bearings and replace them if it is necessary.
- Examine the battery capacity of the product and recommendation to replace the battery if it is necessary.
- Do an update of firmware if new firmware is available.

6 Troubleshooting

6.1 Introduction - troubleshooting

You can find all the troubleshooting messages in the *Messages* menu in Automower® Connect. You can find more information on www.husqvarna.com.

6.2 Fault messages

The fault messages in the table below are shown in the Automower® Connect app. Speak to your Husqvarna representative if the same message shows frequently.

Message	Cause	Action
<i>Cutting system blocked</i>	The cutting motor is blocked by grass or other objects.	Examine the cutting motor and remove grass or other objects.
	The blade disc is in water.	Move the product and prevent the collection of water in the work area.
	The grass is too high.	Adjust the cutting height to the height of the grass.
Adjust the schedule settings to increase the operation time.		
<i>Trapped</i>	The product is behind a number of obstacles in a small area.	Examine the area and remove the obstacles which make it hard for the product to move away from this location.

Message	Cause	Action
<i>No loop signal</i>	The mains cable is not connected.	If the LED indicator on the charging station is out, it shows that there is no power. Examine the power outlet connection and the residual-current device. Make sure that the mains cable is connected to the charging station.
	The mains cable is damaged.	Replace the mains cable.
	<i>ECO mode</i> is enabled and the LED indicator of the charging station flashes green. The product was started manually in the work area but the STOP button was not pushed before the product was moved from the charging station. The charging station signal is disabled and the product cannot enter the charging station. Refer to <i>ECO mode</i> on page 24.	Put the product in the charging station. Start the product. Refer to <i>To start the product</i> on page 26.
	The product does not find the loop signal from the charging station.	Put the product in the charging station and make a new loop signal. Refer to <i>New loop signal</i> on page 24.
	The charging station is not installed correctly.	Install the charging station correctly. Refer to <i>Installation of the charging station</i> on page 17.
	Interference from metal objects such as fences, reinforcement steel or buried cables near the charging station.	Change the position of the charging station.
<i>Outside work area</i>	The work area slopes too much by the virtual boundary.	Make sure that the virtual boundary is installed correctly. Refer to <i>To examine where to install the objects on the map</i> on page 15.
	The transport path or the path to the maintenance point slopes too much.	Make sure that the transport path is installed correctly. Refer to <i>To examine where to install the objects on the map</i> on page 15.
	The product can not find the correct loop signal because of interference with a loop signal from a different product installation nearby.	Put the product in the charging station and make a new loop signal. Refer to <i>New loop signal</i> on page 24.
	Interference from metal objects such as fences, reinforcement steel or buried cables near the charging station.	Change the position of the charging station.

Message	Cause	Action
<i>Empty battery</i>	The product cannot find the charging station.	The product has no accurate position and cannot find the charging station. There is an obstacle that prevents the product to find the charging station.
	The battery is at the end of its life cycle.	Replace the battery. Refer to <i>Battery on page 33</i> .
	The product cannot enter the charging station because the antenna in the baseplate of the charging station is defective.	If the LED indicator on the charging station flashes red, the antenna of the charging station is defective. Speak to your authorized service center.
<i>Slipped</i>	The product hit an obstacle and stopped or the wheels cannot move on the wet grass.	Move the product and correct the cause of problem. If it is because of wet grass, wait until the lawn is dry before you use the product.
	The work area includes a steep slope.	Maximum slope is 45%. Isolate steep slopes. Refer to <i>To install the map objects in a slope on page 15</i> .
<i>Charging station blocked</i>	The connection between the charging plates on the product and the contact plates on the charging station is not good. The product made a number of tries to charge.	Put the product in the charging station and make sure that the charging plates and contact plates are connected. Clean the contact plates on the charging station and the charging plates on the product.
	An object prevents the product to enter the charging station.	Remove the object.
	The charging station tilts or is bent.	Put the baseplate on level ground. If you install the charging station on a soft surface, use the support plate accessory.
<i>Stuck in charging station</i>	The product cannot move out from the charging station because it is blocked. The baseplate has a wet or dirty surface that prevents the product to move out from the charging station.	Examine why the product cannot move out from the charging station. Remove objects and clean the baseplate of the charging station.
<i>Upside down</i>	The product tilts or the body of the product is with the top down.	Put the product in the correct position.
<i>Mower tilted</i>	The product tilts more than the maximum angle.	Move the product to an area that has level ground.
<i>Lifted</i>	The lift sensor was enabled because the product was lifted.	Make sure that the body of the product can move freely around its chassis. Remove or make a stay-out zone around objects that can cause the body of the product to be lifted. If the problem stays, speak to your authorized service center.

Message	Cause	Action
<i>Collision</i>	The body of the product cannot move freely around its chassis.	Remove dirt or object between the chassis and the body of the product. Make sure that the body of the product can move freely around its chassis.
	The product cannot move forward or rearward.	Remove the object that prevents the product from operation.
<i>Wheel motor blocked right/left</i>	The wheel is blocked by grass or other objects.	Examine the wheel and remove grass or other objects.
<i>Alarm! Mower stopped</i>	The alarm was started because the product was stopped.	Adjust the security settings in the <i>Security</i> menu. Refer to <i>Security (Bluetooth® only)</i> on page 24.
<i>Alarm! Mower outside Geofence</i>	Alarm was started because the product was moved out of the GeoFence area.	
<i>Alarm! Mower was moved</i>	The alarm was started because the product was moved.	
<i>Electronic problem</i>	Temporary electronic or firmware problem in the product.	Restart the product. If the problem stays, speak to your approved servicing dealer.
<i>Loop sensor problem</i>		
<i>Charging system problem</i>		
<i>Tilt sensor problem</i>		
<i>Temporary problem</i>		
<i>Invalid sub-device combination</i>		
<i>Collision sensor problem</i>		
<i>Lift sensor problem</i>		
<i>Invalid system configuration</i>		
<i>Safety function faulty</i>		
<i>Docking sensor problem</i>		
<i>Cutting motor problem</i>		
<i>Cutting deck folding sensor problem</i>		
<i>High internal power loss</i>		
<i>Internal voltage problem</i>		
<i>Internal communication problem</i>		
<i>Battery problem</i>	Temporary battery or firmware problem in the product.	Restart the product. If the problem stays, speak to your approved servicing dealer.
	Incorrect type of battery.	Use original batteries recommended by the manufacturer.

Message	Cause	Action
<i>Battery temperature outside limits</i>	The product cannot start because the temperature in the battery is too high or too low.	The product will start to operate when the temperature of the battery has decreased. Make sure that the charging station is put in an area with protection from the sun.
<i>Charging current too high</i>	Incorrect or defective power supply unit.	Examine that the power supply unit and charging station are not defective. Make sure that you use the correct power supply unit and charging station. Restart the product. If the problem stays, speak to your authorized service center.
<i>Map problem</i>	There is no specified work area.	Make a work area in the Automower® Connect app. Refer to <i>To make a work area on page 21</i> .
	The charging station or the reference station was moved.	Move the charging station or the reference station to their initial positions.
		Do a new installation of the map.
	The map object file is incorrect.	Do a check of the map in the app. Adjust the map and save it.
Delete the map and do a new installation.		
<i>Wheel drive problem, right/left</i>	The wheel is blocked by grass or other objects.	Examine the drive wheel and remove grass or other objects.
<i>No power in charging station</i>	The power supply unit is incorrect or defective.	Examine the power supply unit. Replace it if necessary.
	Power failure.	Examine and correct the cause of the power failure.
	The product cannot charge because the contact plates and the charging plates are not connected.	Make sure that the charging plates and the contact plates are connected. Clean the contact plates and charging plates.
<i>Searching for satellites</i>	Weak satellite signal to the reference station.	The satellite signal is temporary weak. The product will start to operate when the satellite signals are good.
		Examine the installation of the reference station. Refer to the Operator's manual for the Reference station.
	Weak satellite signal to the product.	The satellite signal is temporary weak. The product will start to operate when the satellite signal are good.
		Examine if there is an object between the product and the sky that cause interference with the satellite signal. Remove the object or do a new installation to not include these parts in the work area. Refer to <i>To make a work area on page 21</i>

Message	Cause	Action
<i>No accurate position from satellites</i>	Weak satellite signal to the reference station.	Examine the installation of the reference station. Refer to the Operator's manual for the Reference station.
	Weak satellite signal to the product.	Examine if there is an object between the product and the sky that cause interference with the satellite signal. Remove the object or do a new installation to not include these parts in the work area. Refer to <i>To make a work area on page 21</i>
<i>Reference station communication problem</i>	There is no radio signal between the product and the reference station.	Do a pairing operation between the product and the reference station.
	The reference station is not installed correctly.	Examine the installation of the reference station. Refer to the Operator's manual for the Reference station.
	The product does not receive the radio signal from the reference station in all of the work area.	Examine if the product has radio signal from the reference station in the full work area. If not, make a new installation of the reference station or a new installation of the map. Refer to <i>Installation of the map objects on page 19</i> .
	Power failure.	Examine and correct the cause for the power failure of the reference station.
	There is an error in the reference station and the LED indicator flashes red.	Disconnect the power to the reference station and connect it again to restart the reference station. If the problem stays, speak to your approved servicing dealer.
<i>Unexpected cutting height adjustment</i>	The cutting height adjustment cannot move.	Examine the cutting height adjustment and remove grass or other objects. If the problem stays, speak to your approved servicing dealer.
<i>Limited cutting height range</i>		
<i>Cutting height problem</i>		
<i>Cutting height blocked</i>		
<i>Cutting deck not in correct position</i>	The cutting deck is not attached correctly.	Make sure that the cutting deck is attached correctly and that the lever is in the correct position. If the problem stays, speak to your authorized service center.
	The cutting deck is in service position.	Make sure that the cutting deck is in cut position. If the problem stays, speak to your authorized service center.
<i>Destination not reachable</i>	There is no transport path between the charging station and the work area or maintenance point.	Make a transport path between the charging station and the work area or maintenance point.
	The transport path is blocked and the product cannot go to the work area, charging station or maintenance point.	Make sure that the transport path is not blocked, or delete the transport path and make a new transport path.
<i>Too many waypoints</i>	There are too many waypoints in the current work area.	Make a new the work area, stay-out zone and transport path and use less waypoints. Divide the current work area into more work areas.

Message	Cause	Action
<i>Cutting disc major imbalance</i>	The product senses vibrations in the blade disc.	Make sure that the blades and screws are not damaged or worn. Make sure that all blades are correctly attached. Make sure that there is only one blade attached on each position in the blade disc.
<i>Too high battery current</i> <i>Too high internal current</i>	The product has stopped because it has operated on too high or thick grass or in a too steep slope.	Put the product on a level surface with short grass and start the product. If the problem stays, speak to your authorized service center.
<i>High charging power loss</i>	The contact between the charging plates on the cutting deck and the contact plates on the charging station is not good.	Polish the charging plates on the cutting deck and the contact plates on the charging station.
	Temporary electronic or firmware problem in the product.	Start the product. If the problem stays, speak to your authorized service center.
<i>High internal temperature</i>	The product has operated in too high temperature, too high or thick grass or in too steep slope.	Put the product in an area with protection from the sun and wait. Put the product on a level surface with short grass and start the product. If the problem stays, speak to your authorized service center.

6.3 Information and warning messages

The information messages in the table below are shown in the *Messages* menu in the Automower® Connect app. Speak to your Husqvarna representative if the same message shows frequently.

Message	Cause	Action
<i>Cutting system imbalance</i>	The product senses vibrations in the cutting disc.	Examine the blades and screws for damages and wear. Make sure that all blades are correctly installed and that there is only one blade attached in each position on the blade disc.
<i>Connectivity problem</i>	Problem with the Automower® Connect module.	Restart the product. If the connection problem stays, disconnect the product from Automower® Connect and do a new pairing operation. If the problem stays, speak to your local Husqvarna representative.
<i>Wrong PIN code</i>	An incorrect PIN code was entered. 5 tries are permitted, and the product is then blocked for a period of time.	Enter the correct PIN code. If the PIN code is incorrect, use the web address in the app to send the PIN code to your registered e-mail address. If you have not registered the e-mail address, speak to your local Husqvarna representative.
<i>GPS navigation problem</i>	Temporary electronic or firmware related problem in the product.	Restart the product. If the problem stays, speak to your approved servicing dealer.
<i>Connection NOT changed</i>	The signal of the charging station was not changed.	Make a new charging station signal a number of times. If the problem stays, speak to your authorized service center.
	The product is not connected to the charging station.	Do a pairing operation between the product and the charging station. If the problem stays, speak to your authorized service center.
<i>Ultrasonic problem</i>	The ultrasonic sensor is dirty or blocked.	Clean the ultrasonic sensor.
	Temporary electronic or firmware related problem in the product.	Restart the product. If the problem stays, speak to your approved servicing dealer.

6.4 LED indicator lamps on the charging station

For a fully functional installation, the indicator lamps in the charging station must show a solid or flashing green light. If another color shows, follow the troubleshooting guide below.

There is more help on www.husqvarna.com. If you still need help, speak to your local Husqvarna representative.

Light	Status
Green solid light	Good signals.
Green flashing light	The signals are good and <i>ECO mode</i> is activated. Refer to <i>ECO mode on page 24</i> .
Red flashing light	Interruption in the charging station's antenna. Speak to your local Husqvarna representative.
Red solid light	Fault in the circuit board or incorrect power supply in the charging station. The fault must be correct by an authorized service technician. Speak to your local Husqvarna representative.

6.5 Symptoms

If the product does not operate correctly, refer to the symptoms table below.

Symptoms	Cause	Action
The product cannot go into the charging station.	The charging station is not put on a level surface.	Put the charging station on level surface. Refer to <i>To examine where to put the charging station on page 13</i> .
	The charging station is put too far from the work area.	Make a new work area or move the charging station.
The product operates at the incorrect time.	The time and date of the product must be set.	Set the time and date. Refer to <i>Time & date on page 24</i> .
	The start and stop time for operating are incorrect.	Change the schedule settings. Refer to <i>Schedule on page 23</i> .
There is vibration in the product.	The cutting system is not in balance because of damaged blades.	Examine the blades and screws and replace them if it is necessary. Refer to <i>Replacement of the blades and blade discs on page 32</i> .
	The cutting system is not in balance because of too many blades in the same position.	Make sure that only 1 blade is attached to each screw.
	Blades of different thickness are installed on the product.	Examine if the blades are of different thickness and replace the blades if necessary.
The product operates, but the blade disc does not rotate.	The product goes to the charging station.	Usual operation for the product. The blade disc does not rotate when the product goes to the charging station.
The product operates for shorter periods than usual between charges.	Grass or other object causes a blockage to the blade disc.	Remove and clean the blade disc. Refer to <i>To clean the cutting deck and blade discs on page 32</i> .
	The battery is at the end of its life cycle.	Replace the battery. Refer to <i>Battery on page 33</i> .
	The grass is high and thick.	Increase the cutting height and then decrease it when the grass is shorter.
Operation and charging times are shorter than usual.	The battery is at the end of its life cycle.	Replace the battery. Refer to <i>Battery on page 33</i> .
The product is parked for hours in the charging station.	The product is parked because of the set schedule setting, or because <i>Park until further notice</i> is selected.	Change the schedule settings, or start the product.
	The product does not operate if the battery temperature is too high or too low.	The product starts to operate again when the temperature is between the set limits and the schedule settings lets the product operate. Make sure that the charging station is put in an area with protection from the sun.

Symptoms	Cause	Action
The cut result is not satisfactory.	The product operates for a short period.	Increase the operation time. Refer to <i>Schedule on page 23</i> .
	The work area is too large.	Set a limit to the work area, or extend the operation time. Refer to <i>Schedule on page 23</i> .
	Blunt blades.	Replace all the blades. Refer to <i>To replace the blades on the blade disc on page 33</i> .
	Long grass in relation to the set cutting height.	Increase the cutting height and then decrease it when the grass is shorter.
	Collection of grass on the blade disc or around the motor shaft.	Remove the collection of grass and clean the product. Refer to <i>To clean the cutting deck and blade discs on page 32</i> .
	The cutting deck is not calibrated.	Speak to your authorized service center.
The product is in the charging station but does not charge the battery.	The product is not connected to the charging station.	Make a pairing operation to connect the charging station and the product.
	The charging station does not charge.	Disconnect and connect the mains cable to the charging station to restart it and to automatically start the charging.
The product is not connected to the Automower® Connect app.	The product was not connected to the app before and the product is not included in the list <i>My mowers</i> in the Automower® Connect app.	Do a pairing operation between the product and the mobile device.
The product only has Bluetooth® (short-range) connection with the Automower® Connect app and not cellular (long-range) connection.	The product does not have cellular connection to the Automower® Connect app.	Enter the Automower® Connect app on your mobile device. Select Automower® Connect and do a new pairing operation.
You cannot connect with the product with an additional mobile device.	Only one mobile device can be connected to the product with Bluetooth® at the same time.	Disable the Automower® Connect app in all other connected devices. If the problem stays, set the connected mobile device to OFF and start it again. If the problem stays, speak to your dealer.
There was cellular connection before, but there is no cellular connection at this time.	There is a problem with the cellular connection.	<ul style="list-style-type: none"> • Make sure that you have cellular coverage in the area. • Disable Automower® Connect in the app and enable it again. Wait 1 hour and try again. • Restart the product. • If a new firmware is available in the app, install it to make sure that you have the newest firmware. • Make sure that you have the newest version of the Automower® Connect app installed. • If the problem stays, speak to your dealer.


7 Transportation, storage and disposal

7.1 Safety instructions for transportation

- Use an approved transport vehicle for transportation of the product.
- A markets national or local regulations can set limit to the transportation of the product.
- The operator of the transport vehicle is responsible to attach the product safely during transport. Refer to *To safely attach the product for transport on page 45*.

7.1.1 To safely attach the product for transport

- Attach the product with 3 straps, one on the front handle and one on each side handle of the product. The maximum force is 300 N for each strap.

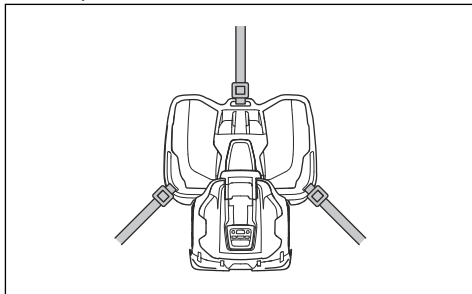

7.2 To put the product into storage

- Charge the product fully. Refer to *To charge the battery on page 27*.
- Set the product to OFF. Refer to *To set the product to OFF on page 27*.
- Clean the product. Refer to *Clean the product on page 32*.
- Put the product in a dry, frost-free area.
- Put the product with all wheels on level ground.

Note: If you keep the charging station outdoors, do not disconnect the cable.

7.3 Transportation of batteries

The supplied Li-ion batteries obey the Dangerous Goods Legislation requirements.

- Obey all applicable national regulations.
- Obey the special requirement on package and labels for commercial transportations, including by third parties and forwarding agents.

7.4 Disposal

- Obey the local recycling requirements and applicable regulations.
- For questions about how to remove the battery, refer to *To remove the battery on page 45*.

7.4.1 To remove the battery




WARNING: Use protective gloves and protective shoes.




CAUTION: Only remove the batteries when you dispose the product. The Husqvarna warranty is not applicable if you remove the warranty seal.


1. Remove the top cover.

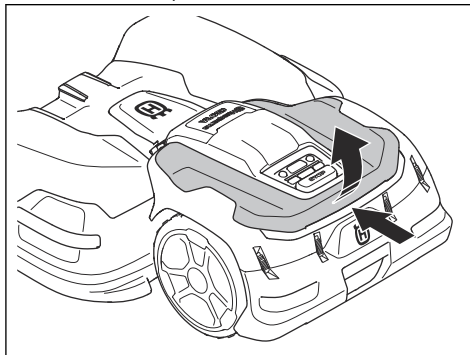


2. Loosen the clips with the flat screwdriver on the Combi tool and remove the rear bumper.

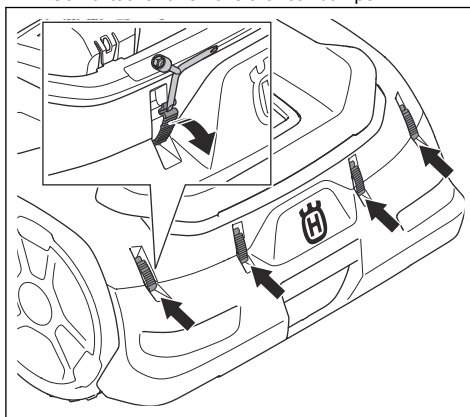


3. Disconnect the cable.

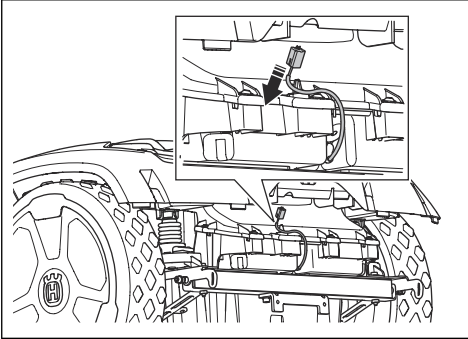


4. Remove the 4 nuts.

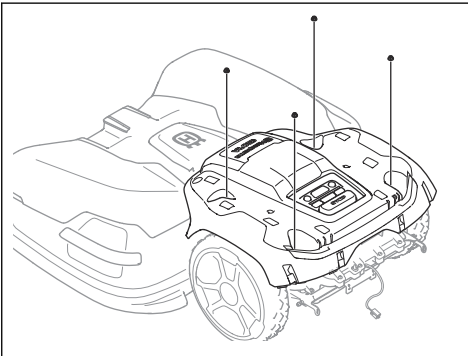


5. Remove the body of the product.

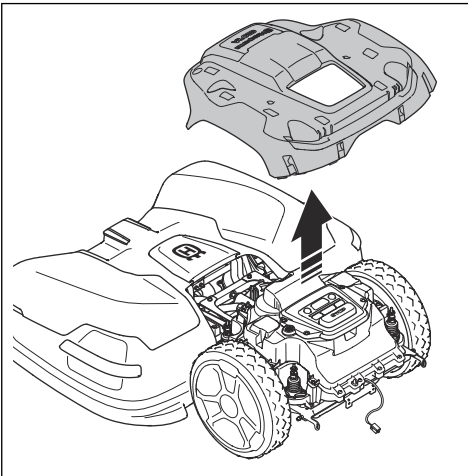


6. Remove the 13 screws.

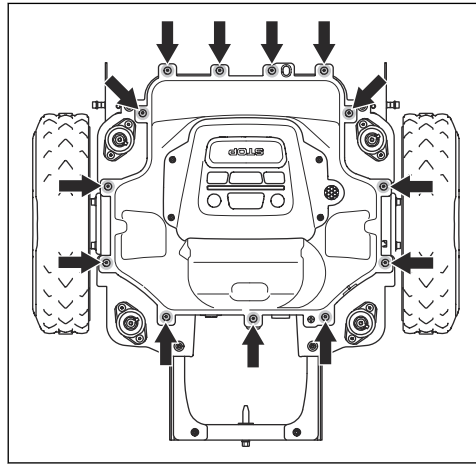


7. Fold the top of the chassis carefully.

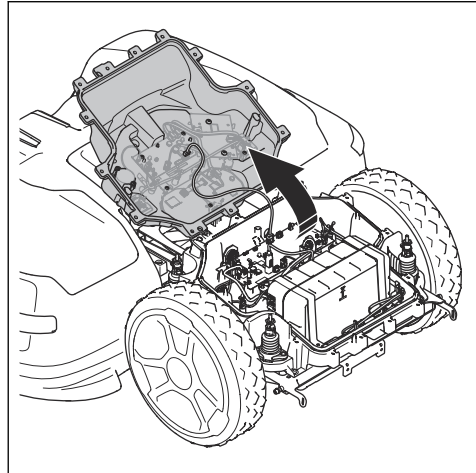

8. Disconnect the 2 cables from the battery.

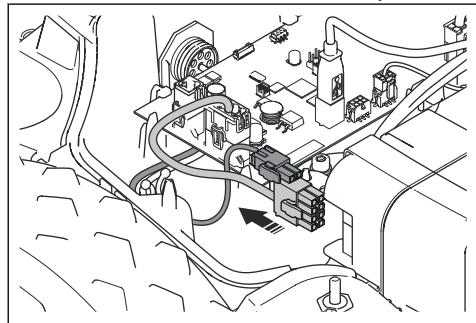

9. Remove the 4 screws for the battery bracket.

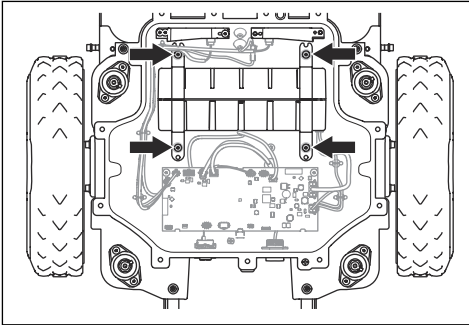

10. Remove the battery from the product.

8 Technical data

8.1 Technical data

System	CEORA™ 544 EPOS CEORA™ RAZOR 43M CEORA™ CS4	CEORA™ 546 EPOS CEORA™ RAZOR 43M CEORA™ CS4
Dimensions, drive unit and cutting deck		
Length, cm/in.	124/48.8	124/48.8
Width, cm/in.	108/42.5	108/42.5
Height, cm/in.	44/17.3	44/17.3
Weight, kg/lb	72/160	72/160
Mowing ¹¹		
Area capacity, m ² /acre(s), regular quality	60000/15	75000/18
Area capacity, m ² /acre(s), pro quality	40000/10	50000/12
Area capacity, m ² /acre(s), pro sport quality	20000/5	25000/6
Area per hour, no charging, m ² /acre(s)	1350/0.33	1800/0.44
Power consumption during cutting, average, W	170	210
Maximum blade motor speed, rpm	2800	3000
Mean energy consumption at maximum use, kWh/month	110	130
Mowing time, average, min	320	270
Charging time, average, min	150	150
Narrowest possible passage, m/ft.	3/9.8	3/9.8
Maximum slope inside installation, %	20	20
Maximum slope for virtual boundary, %	15	15
Sound data ¹²		
Sound level perceived, dB (A)	69	72
Measured sound power noise level, dB (A)	68	69
Noise emissions uncertainties K _{WA} , dB (A)	1	1
Sound pressure noise level at the operator's ear ¹³ , dB (A)	60	61

¹¹ The area capacity is specified by the condition of the blades and the type, growth and moisture of the grass.

¹² Determined according to Directive 2006/42/EC and standard EN 50636-2-107. Except Sound level, perceived that is measured according to ISO 11094:1991.

¹³ Sound pressure noise uncertainties K_{pA}, 2-4 dB (A).

Drive unit	CEORA™ 544 EPOS	CEORA™ 546 EPOS
Dimensions		
Length, cm/in.	67/26.4	67/26.4
Width, cm/in.	72/28.3	72/28.3
Height, cm/in.	44/17.3	44/17.3
Weight, kg/lb	38/84	38/84
Battery		
Battery, Lithium-Ion 36.3V, 49 Ah, Art. No	593 78 54-01	593 78 54-01
Product data		
Speed km/h / mph	2.7/1.7	3.6/2.2
IP code	IPX5	IPX5

Cutting deck	CEORA™ RAZOR 43M
Dimensions	
Length, cm/in.	78/59.4
Width, cm/in.	108/38.6
Height, cm/in.	34/13.0
Weight, kg/lb	34/76
Cutting system	
Cutting system	3 discs with 5 pivoting blades
Cutting height, cm/in.	2-7/0.8-2.8
Cutting width, cm/in.	68/26.8
IP code	IPX5
Blades	Automower® standard blades, Automower® Enhance HSS blades

Charging station	CEORA™ CS4
Dimensions	
Length, cm/in.	151/59.4
Width, cm/in.	98/38.6
Height, cm/in.	33/13.0
Weight, kg/lb	15.5/34.2
Electrical system	
Power supply (36V DC), V AC	100-240
Mains cable for charging station, length m/ft	3/9.8
Charging current, A DC	12

Charging station	CEORA™ CS4
Type of Power Supply Unit for charging station ¹⁴	ADP-500BR
IP code charging station	IPX4
IP code power supply unit	IPX44/IPX4
Charging station wire antenna	
Operating Frequency Band, Hz	100-80000
Maximum magnetic field, dBuA/m	82
Maximum Radio-frequency power ¹⁵ , mW @60m	<25 mW @60m

Frequency Band Support	
Bluetooth® Frequency range	2400.0-2483.5 MHz
Automower® Connect 2G	GSM 850 MHz, E-GSM 900 MHz, DCS 1800 MHz, PCS 1900 MHz
Automower® Connect 4G	Band 12 (700 MHz), Band 17 (700 MHz), Band 28 (700 MHz), Band 13 (700 MHz), Band 20 (800 MHz), Band 26 (850 MHz), Band 5 (850 MHz), Band 19 (850 MHz), Band 8 (900 MHz), Band 4 (1700 MHz), Band 3 (1800 MHz), Band 2 (1900 MHz)
SRD868 (Europe)	863-870 MHz
SRD915 (North America)	902-928 MHz
SRD915 (Australia)	915-928 MHz
SRD915 (New Zealand)	915-928 MHz

Power Class		
Bluetooth® Output power	8 dBm	
Automower® Connect 2G	Power Class 4 (GSM/E-GSM)	33 dBm
	Power Class 1 (DCS/PCS)	30 dBm
	Power Class E2 (GSM/E-GSM)	27 dBm
	Power Class E2 (DCS/PCS)	26 dBm
Automower® Connect 4G	Power Class 3	23 dBm
SRD868 (Europe)	13 dBm	
SRD915 (North America)	13 dBm	
SRD915 (Australia)	13 dBm	
SRD915 (New Zealand)	13 dBm	

Full compatibility cannot be guaranteed between the product and other types of wireless systems such as remote controls, radio transmitters, hearing loops, buried electric animal fencing or similar.

The products are made in England or the Czech Republic. See information on the rating plate. Refer to *Introduction on page 6*.

¹⁴ XX, YY can be any alphanumeric characters or blank for marketing purpose only, no technical differences.

¹⁵ Maximum active output power to antennas in the frequency band in which the radio equipment operates.

8.2 Registered trademarks

The *Bluetooth*[®] word mark and logos are registered trademarks owned by *Bluetooth SIG, inc.* and any use of such marks by Husqvarna is under license.

9 Warranty

9.1 Warranty terms

Husqvarna® warranty covers this product's functionality for a period of 2 years from date of purchase. The warranty covers serious faults relating to materials or manufacturing faults. Within the warranty period, we will replace the product or repair it at no charge if the following terms are met:

- The product and the charging station may only be used in compliance with the instructions in this Operator's Manual. This manufacturer's warranty does not affect warranty entitlements against the dealer/retailer.
- End-users or non-authorized third parties must not attempt to repair the product.

Examples of faults which are not included in the warranty:

- Damage caused by water seepage from using a high-pressure washer, or from being submerged under water, for example when heavy rain forms pools of water.
- Damage caused by lightning.
- Damage caused by improper battery storage or battery handling.
- Damage caused by using a battery that is not a Husqvarna original battery.
- Damage caused by not using Husqvarna original spare parts and accessories, such as blades and installation material.
- Damage caused by non-authorized changing or tampering with the product or its power supply.

The blades and wheels are seen as disposable and are not covered by the warranty.

If an error occurs with your Husqvarna product, please contact Husqvarna customer service for further instructions. Please have the receipt and the product's serial number at hand when contacting Husqvarna customer service.

10 EU Declaration of Conformity

We, Husqvarna AB, SE 561 82 Huskvarna, SWEDEN,
Tel. +46 36 146500 declare on our sole responsibility
that the product:

Description	Robotic lawn mower
Brand	Husqvarna
Type/Model	HUSQVARNA CEORA™
Identification	Serial numbers dating from 2022 week 4

complies fully with the following EU directives and regulations:

Regulation	Description
2006/42/EC	Relating to machinery
2014/53/EU	Relating to radio equipment
2011/65/EU	Restriction of use of certain hazardous substances

and that the following harmonized standards and/or technical specifications are applied;

- IEC 60335-1:2010+A1:2013+A2:2016 (EN 60335-1:2012+AC:2014+A11:2014+A13:2017)
- IEC 60335-2-107:2017+A1:2020 (EN 50636-2-107:2015+A1:2018+A2:2020)
- EN ISO 12100:2010
- EN IEC 63000:2018
- EN 61000-6-1:2007
- EN 61000-6-3:2007+A1:2011+AC:2012
- ETSI EN 301 489-1 V2.2.3
- ETSI EN 301 489-3 V2.1.1
- ETSI EN 301 489-17 V3.1.1
- ETSI EN 301 489-19 V2.1.1
- ETSI EN 301 489-52 V1.1.0
- Draft ETSI EN 303 447 V1.2.1_0.1.16
- ETSI EN 300 328 V2.2.2
- ETSI EN 300 220-1 V3.1.1
- ETSI EN 300 220-2 V3.1.1
- ETSI EN 301 908-1 V13.1.1
- ETSI EN 301 908-13 V13.1.1
- ETSI EN 301 511 V.12.5.1
- ETSI EN 303 413 V1.1.1





Husqvarna[®]

AUTOMOWER[®] is a trademark owned by Husqvarna AB.
Copyright[®] 2022 HUSQVARNA. All rights reserved.

www.husqvarna.com

Original instructions

1141370-26



2022-05-27